1155 STAT Series Caster Series (All Plastic)



Resolute (blue gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

KS-11550500454093

Casters equipped with a double-With locking system, 75x45 angled hole Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "
Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 3-7/8 " x 2-3/4 "

 Bolt Hole Spacing
 3 " x 1-13/16 "

 Plate Hole
 3/8 " x 3/8 "

 Offset
 1-1/2 "

 Swivel Interference
 9 "

Overall Height 6-9/16 "
Swivel Radius 4-1/2 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.0lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance •

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

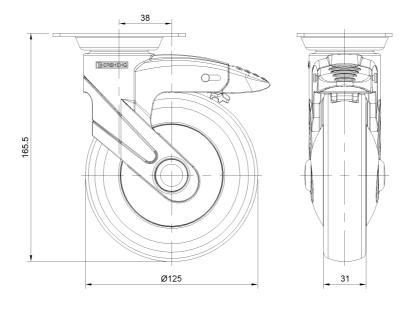

Mounting

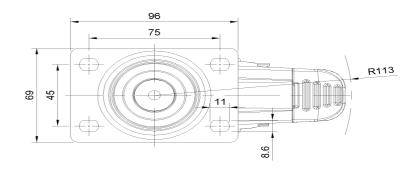

st For any deviation between metric and imperial spec, please refer to the metric spec.