

1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray) Wheel Diameter × Wheel Width 125 x 31mm

A

KS-11550500456143

Equipped with double-brake With locking system Casters, Threaded Stem M16x25
 Blue-gray legs made of polyamide reinforcement, Threaded Stem installation
 Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for
 Smooth rotation
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
 Polypropylene Rubber (TPR) Wheel Tread
 Dark gray Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M16
Threaded Length	25mm
Offset	38mm
Swivel Interference	226mm
Overall Height	164mm
Swivel Radius	113mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.80kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

Dimensions

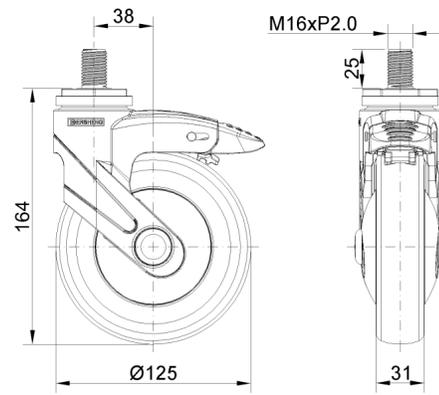

Mounting

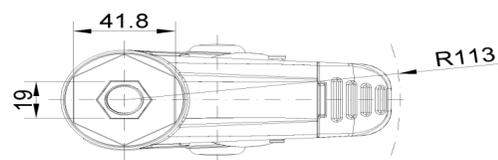

* For any deviation between metric and imperial spec, please refer to the metric spec.