## 1155 STAT Series Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Resolute (blue gray) Wheel Diameter × Wheel Width 125 x 31mm


EAN

KS-11550500457013

Cassette with movable With locking system, Ø28x30L, with C-ring Blue-gray legs made of polyamide reinforcement, plug-in Mounting Type Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

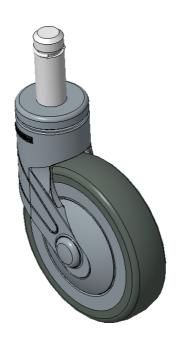

Picture may differ from original product

## **Technical Data**

● Metric ○ Imperial

Wheel Diameter 125mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 21.6mm Stem Length 56mm Offset 38mm **Swivel Interference** 226mm Overall Height 163mm **Swivel Radius** 113mm Hardness Of Tread

72±5° Shore A

Load Capacity (Dynamic) 90kgs Load Capacity (Static) 135kgs

-20°C to +60°C Temperature

Fork Type **Swivel Caster** 

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.77kgs

Standard


Advantages at a glance


Rolling Resistance

**Operating Noise** 

Floor Surface Preservation • • • • •

## Dimensions

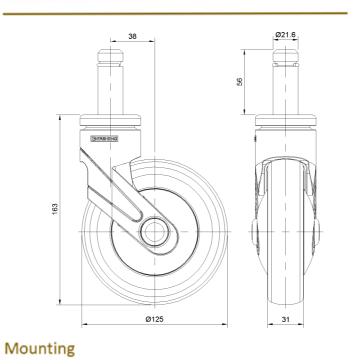

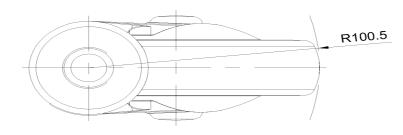

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883