1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth37) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11550502261063

Rigid Casters, high-grade Top Plate—75x45 angled hole Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm

Wheel Width 24.5mm

Wheel Bearing Wheel With Plain Bearing

Plate Size

96 x 69mm

Bolt Hole Spacing

75 x 45mm

Plate Hole

11 x 8.6mm

Overall Height

Hardness Of Tread

165.5mm

82±5° Shore A

Load Capacity (Dynamic)

70kgs

Load Capacity (Static)

105kgs

Temperature

-20°C to +60°C

Fork Type

Rigid Caster

Stainless

N/A N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.70kgs

Standard

ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ

Operating Noise


 \bullet \bullet \circ

Floor Surface Preservation • • • • •

Dimensions

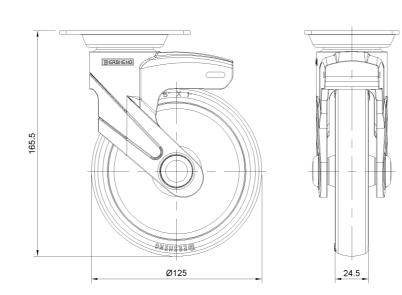

Mounting

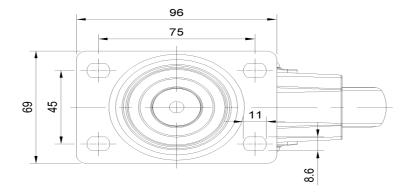

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.