1155 STAT Series Caster Series (All Plastic)



PPR (Pearl Deep Grey All Plastic -1) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11550502262023

Actual Casters, high-grade Top Plate—75x45 angled hole Top Plate Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter Wheel Width

Wheel Bearing Wheels With Ball Bearings

3-7/8 " x 2-3/4 " Plate Size 3 " x 1-13/16 " **Bolt Hole Spacing** 3/8 " x 3/8 " Plate Hole 1-1/2 " Offset Swivel Interference Overall Height 6-9/16 " Swivel Radius

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 176lbs Load Capacity (Static) 265lbs

-4°F to +140°F Temperature Fork Type **Swivel Caster**

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.5lbs ISO22883 Standard


Advantages at a glance


Rolling Resistance

Operating Noise

Floor Surface Preservation • • • • •

Dimensions

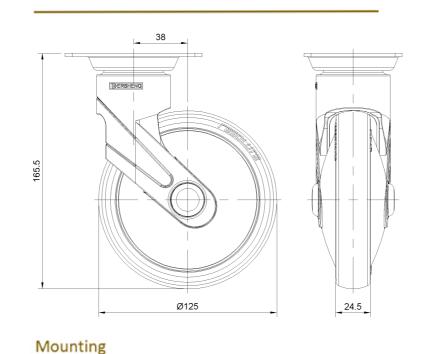

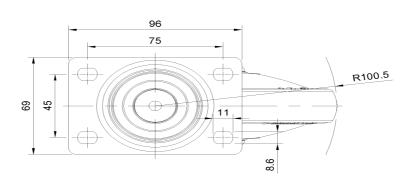

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.