




1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 125 x 31mm

EAN  
KS-11550502264143

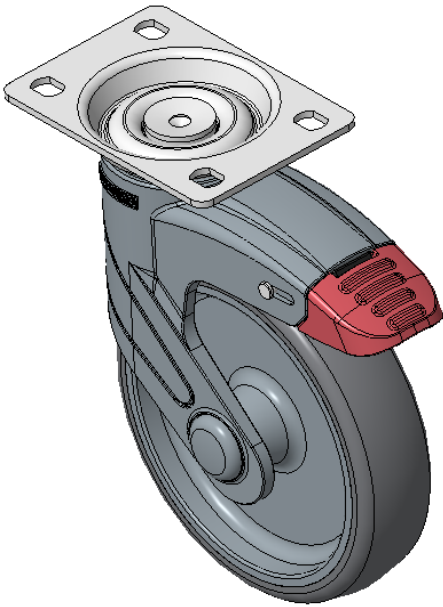

Casters with a long double-lock system, high-grade Top Plate—75x45 angled hole Top Plate  
Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 5 "                            |
| Wheel Width                                                            | 1-1/4 "                        |
| Wheel Bearing                                                          | Wheel With Plain Bearing       |
| Plate Size                                                             | 3-7/8 " x 2-3/4 "              |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "                |
| Plate Hole                                                             | 3/8 " x 3/8 "                  |
| Offset                                                                 | 1-1/2 "                        |
| Swivel Interference                                                    | 9 "                            |
| Overall Height                                                         | 6-9/16 "                       |
| Swivel Radius                                                          | 4-1/2 "                        |
| Hardness Of Tread                                                      | 82±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 198lbs                         |
| Load Capacity (Static)                                                 | 298lbs                         |
| Temperature                                                            | -4°F to +140°F                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 1.8lbs                         |
| Standard                                                               | ISO22881                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

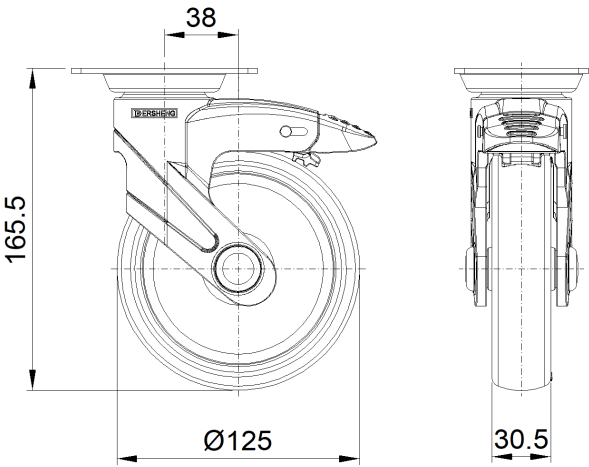

Mounting

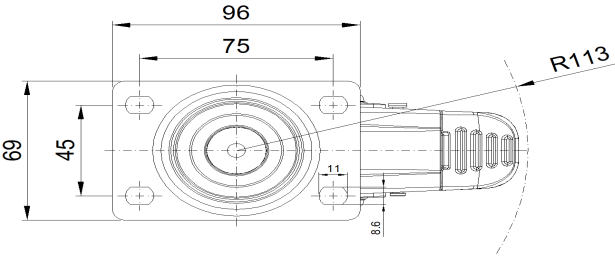

\* For any deviation between metric and imperial spec, please refer to the metric spec.