



1155 STAT Series Caster Series (All Plastic)


PPR Wheel (Pearl Deep Grey - Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 125 x 31mm

EAN  
KS-11550502264153

Casters with a long double-With locking system, high-grade Top Plate—75x45 angled hole Top Plate  
Pearlescent legs made of polyamide reinforcement, Mounting Type - Top Plate  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

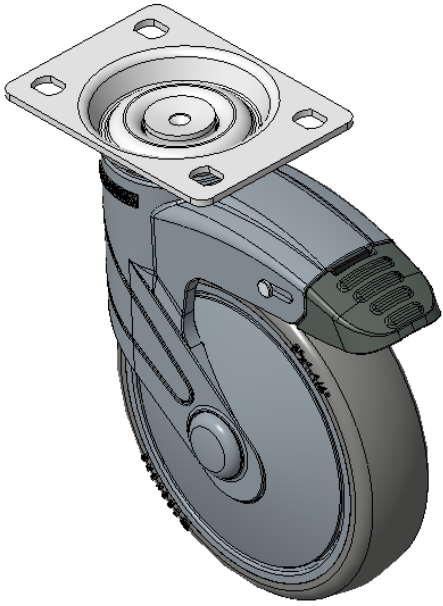

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 125mm                          |
| Wheel Width                                                            | 30.5mm                         |
| Wheel Bearing                                                          | Wheel With Plain Bearing       |
| Plate Size                                                             | 96 x 69mm                      |
| Bolt Hole Spacing                                                      | 75 x 45mm                      |
| Plate Hole                                                             | 11 x 8.6mm                     |
| Offset                                                                 | 38mm                           |
| Swivel Interference                                                    | 226mm                          |
| Overall Height                                                         | 165.5mm                        |
| Swivel Radius                                                          | 113mm                          |
| Hardness Of Tread                                                      | 82±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 90kgs                          |
| Load Capacity (Static)                                                 | 135kgs                         |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.86kgs                        |
| Standard                                                               | ISO22881                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

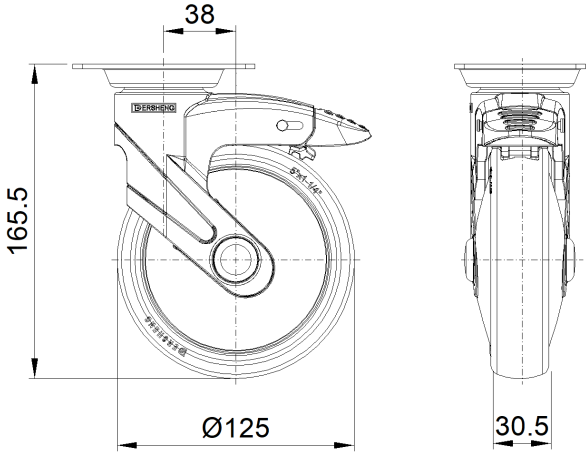

Mounting

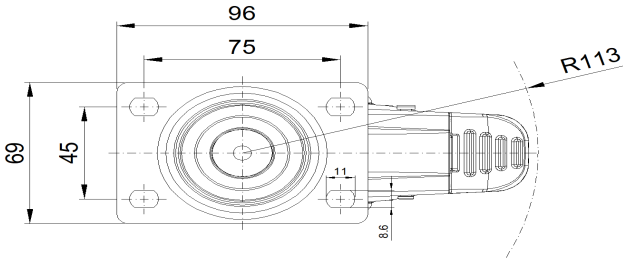

\* For any deviation between metric and imperial spec, please refer to the metric spec.