## 1155 STAT Series Caster Series (All Plastic)

PPR Wheel (Pearl Deep Grey - Plain Bearing Hub Lenth 35) Wheel Diameter x Wheel Width 125 x 31mm

EAN

KS-11550502264233

Casters with long directional brake With locking system, high-grade Top Plate—75x45 angled hole Top Plate

Pearlescent dark gray legs made of polyamide reinforcement, Mounting Type - Top Plate

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 96 x 69mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11 x 8.6mm

Offset 38mm

Swivel Interference 226mm

Overall Height 165.5mm

Swivel Radius 113mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Directional Lock

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.86kgs

Standard ISO22881

### Advantages at a glance

Rolling Resistance


 $\bullet \bullet \bullet \circ$ 

**Operating Noise** 


• • •

Floor Surface Preservation • • • • •

### Dimensions



# Mounting

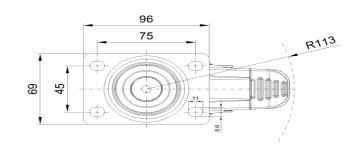

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.