1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth37) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11550502264263

Casters with long directional brake With locking system, high-grade Top Plate—75x45 angled hole Top Plate

Blue-gray legs made of polyamide reinforcement, Mounting Type - Top Plate Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-7/8 " x 2-3/4 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 3/8 " x 3/8 "

Offset 1-1/2 "

Swivel Interference 9 "

Overall Height 6-9/16 "
Swivel Radius 4-1/2 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Directional Lock

ISO22881

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.8lbs

Standard

Advantages at a glance

Rolling Resistance


• • • • 0

Operating Noise


• • • 0

Floor Surface Preservation • • • • •

Dimensions



Mounting

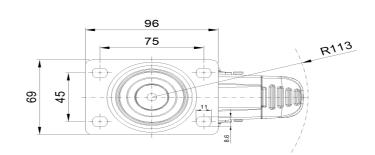

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.