1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth37) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11550502269233


Long double-brake type, With locking system Casters, hollow rivets—12 hollow holes Blue-gray legs made of polyamide reinforcement, locking installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 125mm
Wheel Width 24.5mm

Wheel Bearing Wheel With Plain Bearing

Single Bolt HoleCentre Hole 12.2mm

Offset 38mm

Swivel Interference 226mm

Overall Height 163mm

Swivel Radius 113mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.75kgs

Standard ISO22881

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ

Operating Noise


• • • 0

Floor Surface Preservation • • • • •

Dimensions



Mounting

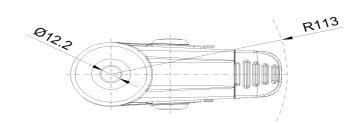

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.