




1155-1 Light Plastic-1 Series

PR Wheel (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width  
125 x 24.5mm

EAN

KS-11550593262063

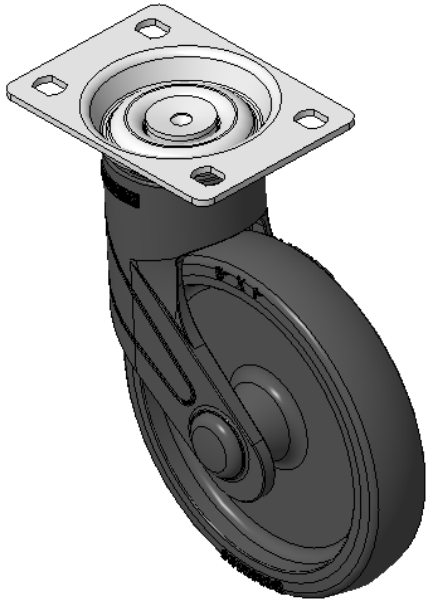

Actual Casters, high-grade Top Plate—75x45 angled perforated Top Plate  
Black legs made of polyamide reinforcement, Mounting Type - Top Plate  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Black, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


☒ Metric ☐ Imperial

|                         |                          |
|-------------------------|--------------------------|
| Wheel Diameter          | 125mm                    |
| Wheel Width             | 24.5mm                   |
| Wheel Bearing           | Wheel With Plain Bearing |
| Plate Size              | 96 x 69mm                |
| Bolt Hole Spacing       | 75 x 45mm                |
| Plate Hole              | 11 x 8.6mm               |
| Offset                  | 38mm                     |
| Swivel Interference     | 201mm                    |
| Overall Height          | 165.5mm                  |
| Swivel Radius           | 100.5mm                  |
| Hardness Of Tread       | 82±5° Shore A            |
| Load Capacity (Dynamic) | 90kgs                    |
| Load Capacity (Static)  | 135kgs                   |
| Temperature             | -20°C to +60°C           |
| Fork Type               | Swivel Caster            |
| Stainless               | N/A                      |
| Electrical Conductivity | N/A                      |
| Anti-Static             | N/A                      |
| Weight                  | 0.64kgs                  |
| Standard                | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

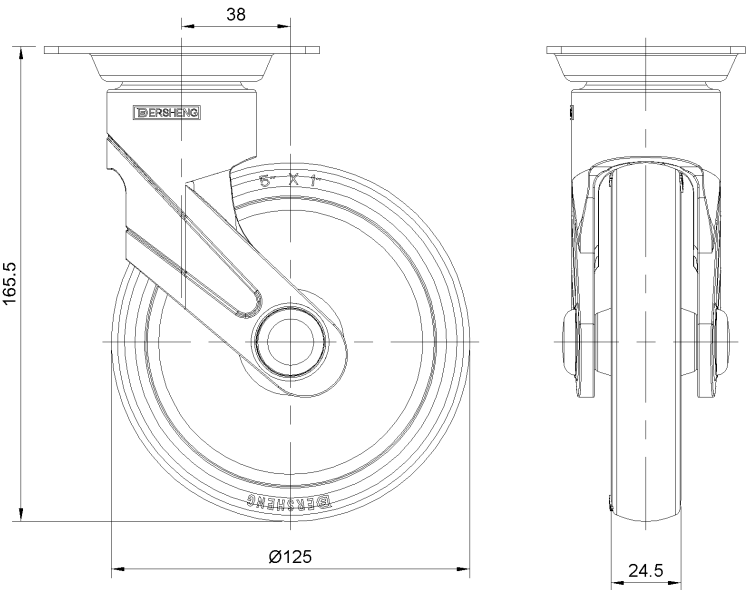

Mounting

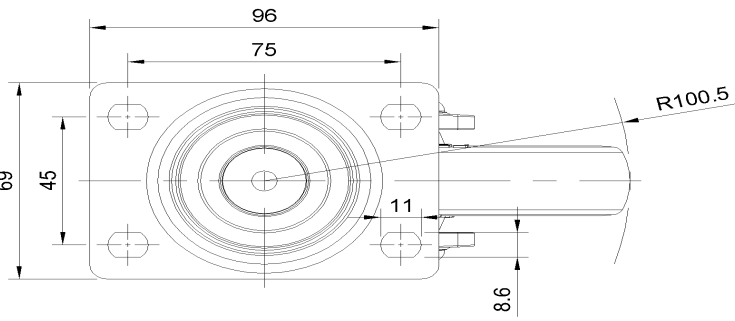

\* For any deviation between metric and imperial spec, please refer to the metric spec.