



1155-1 Light Plastic-1 Series

PPR (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 125 x 31mm

EAN


KS-11550593267273

Rigid Casters, pin rivets—Ø28x30L Black legs made of polyamide reinforcement, pin-mounted installation Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Black, wheels—Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

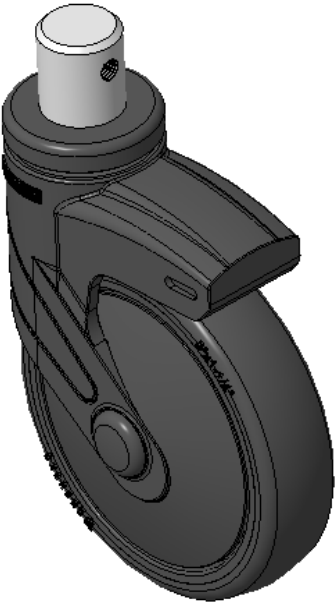

Picture may differ from original product

Technical Data


Imperial Metric

|                         |                          |
|-------------------------|--------------------------|
| Wheel Diameter          | 5 "                      |
| Wheel Width             | 1-1/4 "                  |
| Wheel Bearing           | Wheel With Plain Bearing |
| Stem Diameter           | 1-1/8 "                  |
| Stem Length             | 1-3/16 "                 |
| Offset                  | 1-1/2 "                  |
| Overall Height          | 6-1/2 "                  |
| Hardness Of Tread       | 82±5° Shore A            |
| Load Capacity (Dynamic) | 198lbs                   |
| Load Capacity (Static)  | 298lbs                   |
| Temperature             | -4°F to +140°F           |
| Fork Type               | Rigid Caster             |
| Stainless               | N/A                      |
| Electrical Conductivity | N/A                      |
| Anti-Static             | N/A                      |
| Weight                  | 1.7lbs                   |
| Standard                | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

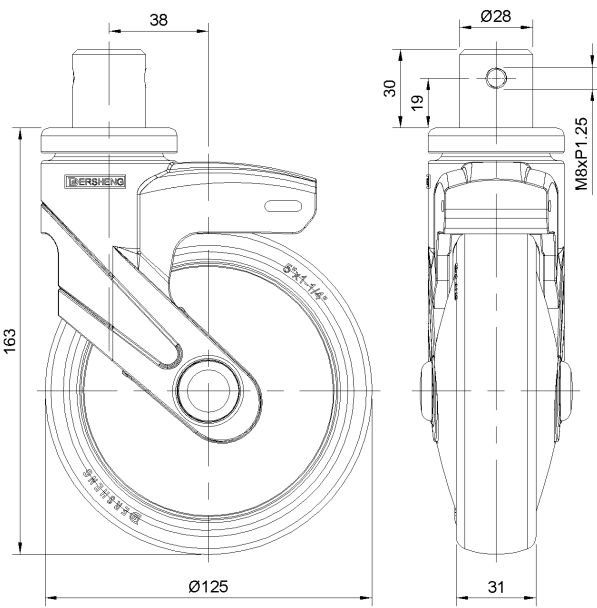

Mounting

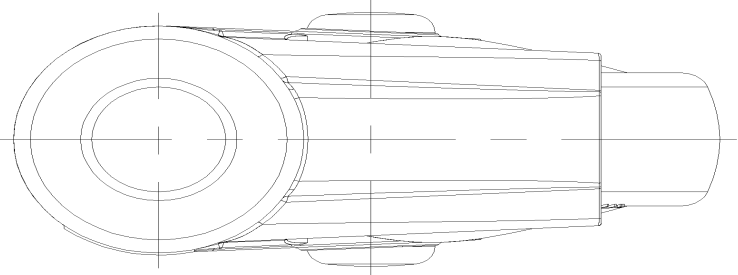

\* For any deviation between metric and imperial spec, please refer to the metric spec.