


1155-1 Light Plastic-1 Series

PPR (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width 125 x 31mm

EAN

KS-11550593267323

Actuable Casters, rivet-type—Ø28x30L
 Black legs made of polyamide reinforcement, swivel-type Mounting Type
 Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
 Black, wheels—Plain Bearing

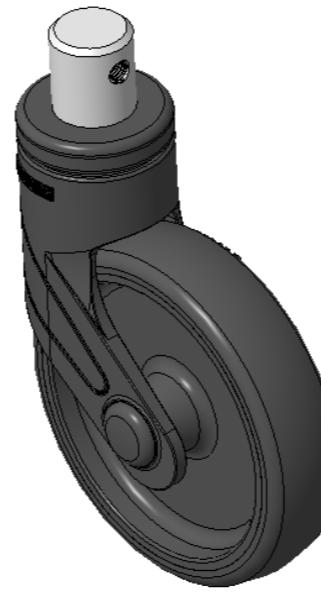

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 125mm

Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Stem Diameter 28mm

Stem Length 30mm

Offset 38mm

Swivel Interference 201mm

Overall Height 163mm

Swivel Radius 100.5mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.70kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ● ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ●

Dimensions

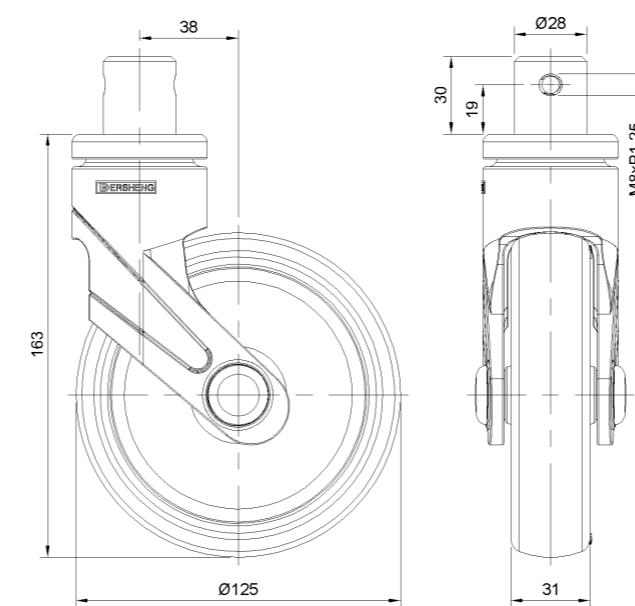

Mounting

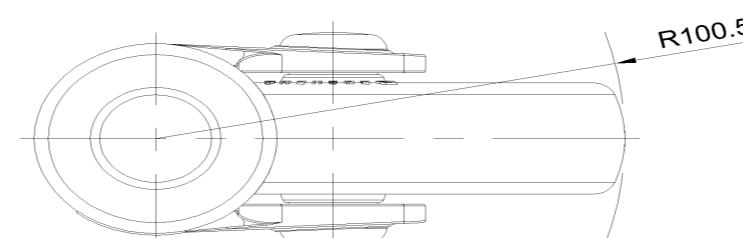

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com