



1155-1 Light Plastic-1 Series

PR Wheel (Black Black - Plain Bearing Hub Lenth 37) Wheel Diameter x Wheel Width  
125 x 24.5mm


EAN

KS-11550593268143

Casters with directional brake With locking system, pin-fit Ø28x30L  
Black legs made of polyamide reinforced material, pin-mounted.  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation.  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.  
Black, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

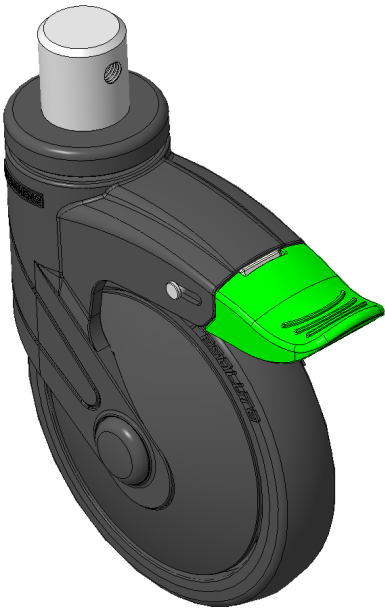

Picture may differ from original product


Technical Data

|                                                                        |                                     |
|------------------------------------------------------------------------|-------------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                     |
| Wheel Diameter                                                         | 5 "                                 |
| Wheel Width                                                            | 1 "                                 |
| Wheel Bearing                                                          | Wheels With Ball Bearings           |
| Stem Diameter                                                          | 1-1/8 "                             |
| Stem Length                                                            | 1-3/16 "                            |
| Offset                                                                 | 1-1/2 "                             |
| Swivel Interference                                                    | 10 "                                |
| Overall Height                                                         | 6-1/2 "                             |
| Swivel Radius                                                          | 5 "                                 |
| Hardness Of Tread                                                      | 82±5° Shore A                       |
| Load Capacity (Dynamic)                                                | 198lbs                              |
| Load Capacity (Static)                                                 | 298lbs                              |
| Temperature                                                            | -4°F to +140°F                      |
| Fork Type                                                              | Swivel Caster With Directional Lock |
| Stainless                                                              | N/A                                 |
| Electrical Conductivity                                                | N/A                                 |
| Anti-Static                                                            | N/A                                 |
| Weight                                                                 | 1.7lbs                              |
| Standard                                                               | ISO22883                            |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

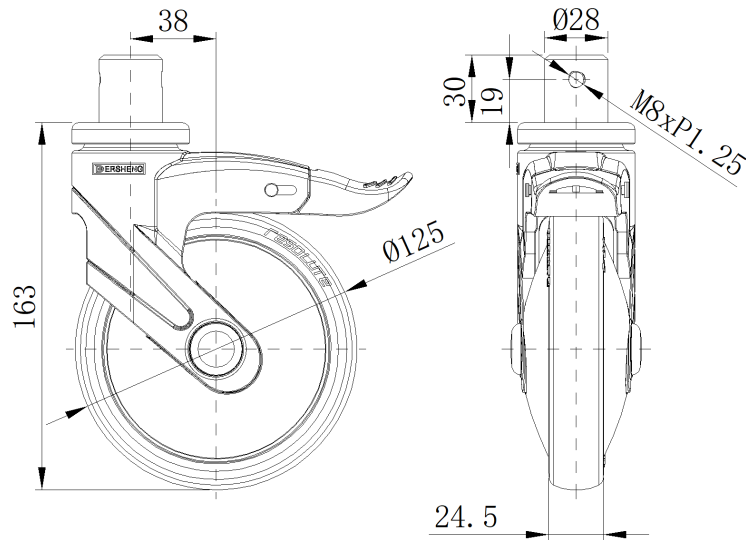

Mounting

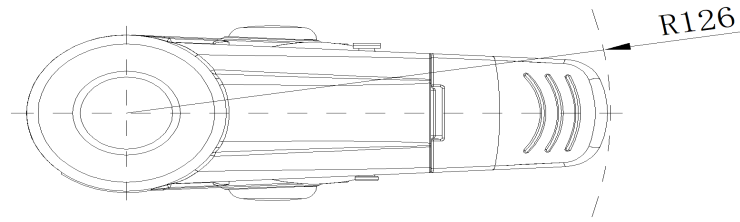

\* For any deviation between metric and imperial spec, please refer to the metric spec.