

Product Information Sheet



1156 56 Series Central Locking Caster Series

PPR Wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN


KS-11560500268313

Short lever, Hexagonal hole cam control, center-locking, full-brake Caster
Steel plate frame with white exterior Decorative Plastic Cover
Rust-proof, Corrosion resistant, Attractive appearance, and rotates smoothly
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product.

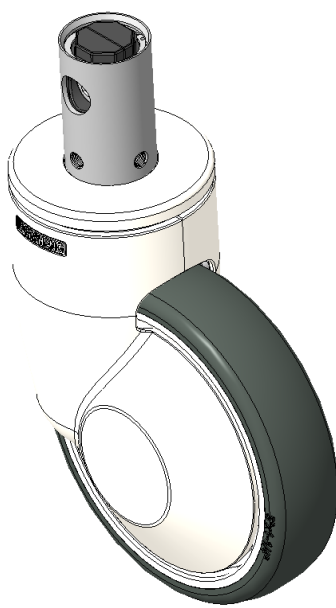

Picture may differ from original product

Technical Data

☒ Imperial ☐ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 1-5/16 "

Stem Length 3-7/8 "

Offset 1-3/8"

Swivel Interference 7-3/4"

Overall Height 6-5/16 "

Swivel Radius 3-15/16"

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic)	265lbs
-------------------------	--------

Load Capacity (Static)	413lbs
------------------------	--------

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless	N/A
-----------	-----

Electrical Conductivity	N/A
-------------------------	-----

Anti-Static	N/A
-------------	-----


Weight 2.3lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

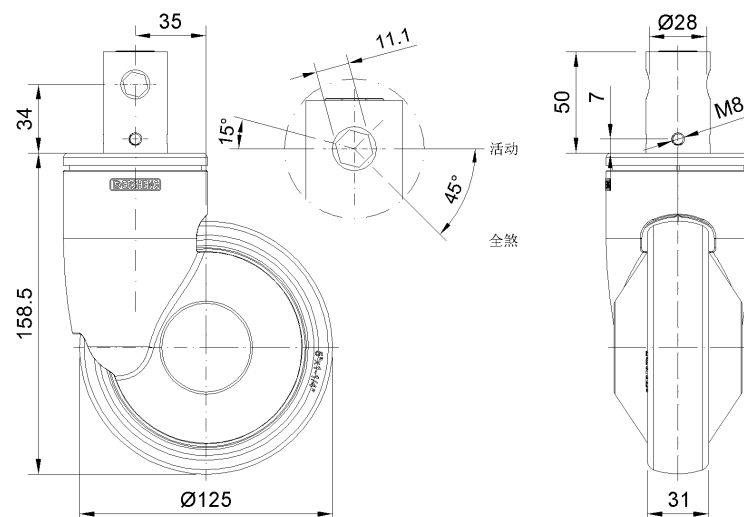

Mounting

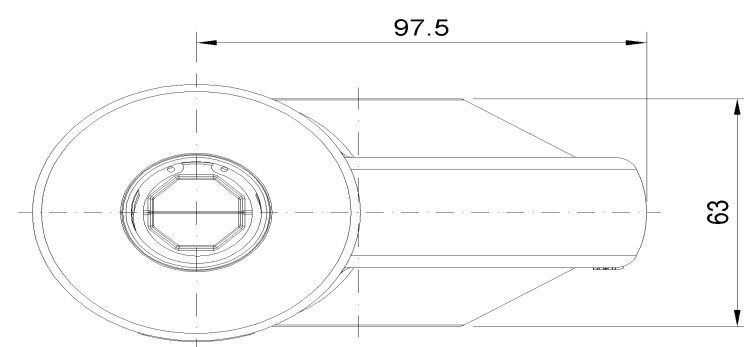

* For any deviation between metric and imperial spec, please refer to the metric spec.