



1156 56 Series Central Locking Caster Series


PPR (white dark gray) Wheel Diameter x Wheel Width 200 x 31mm

EAN  
KS-11560800268123

Short lever, Hexagonal hole cam control, center locking, Total Brake Casters  
Stamping Fabricated Caster Fork legs, white exterior Decorative Plastic Cover  
Rust-proof, Corrosion resistant, Attractive appearance, and rotates smoothly  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

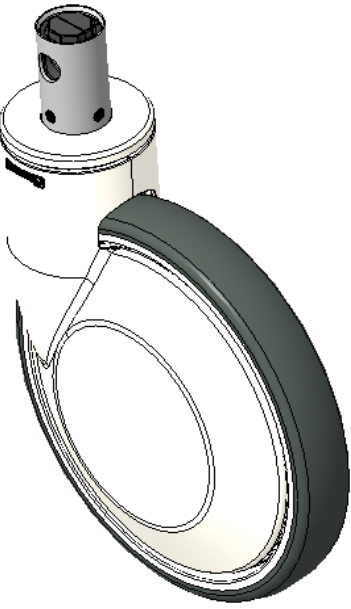

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 200mm                          |
| Wheel Width                                                            | 031mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Stem Diameter                                                          | 32mm                           |
| Stem Length                                                            | 50mm                           |
| Offset                                                                 | 60mm                           |
| Swivel Interference                                                    | 320mm                          |
| Overall Height                                                         | 229mm                          |
| Swivel Radius                                                          | 160mm                          |
| Hardness Of Tread                                                      | 82±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 150kgs                         |
| Load Capacity (Static)                                                 | 225kgs                         |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 1.96kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

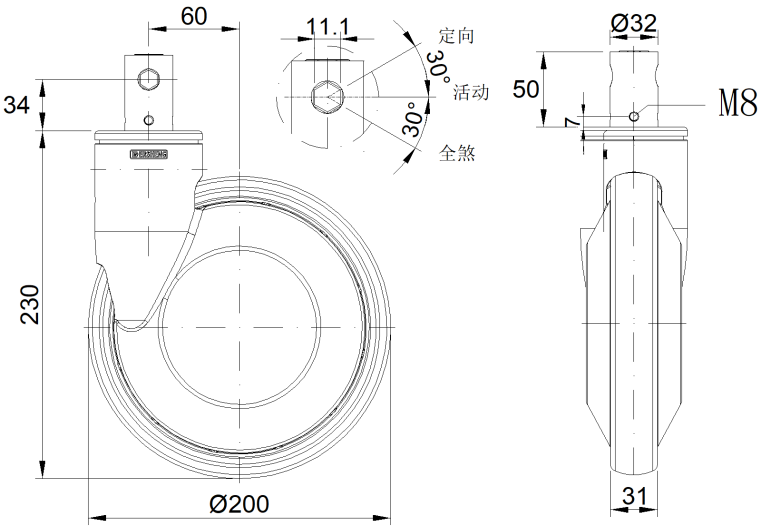

Mounting

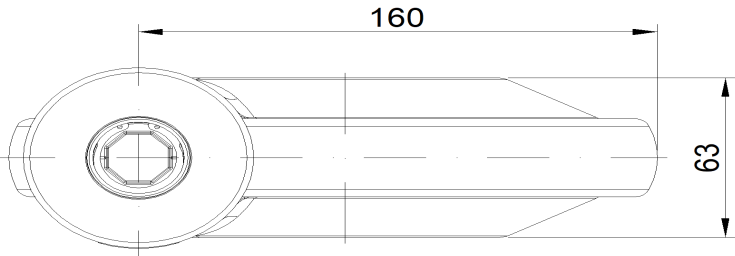

\* For any deviation between metric and imperial spec, please refer to the metric spec.