



1157 57 Series Caster Series

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 100 x 37mm


EAN

KS-11570400044041

Front Brake locking system, Welded Caster Fork  
Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
Cast Iron Wheel Center, High-Quality, highly Resilient Rubber Wheel Tread, Cast Iron in natural color  
Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel surface: Made of high-quality, highly elastic rubber  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

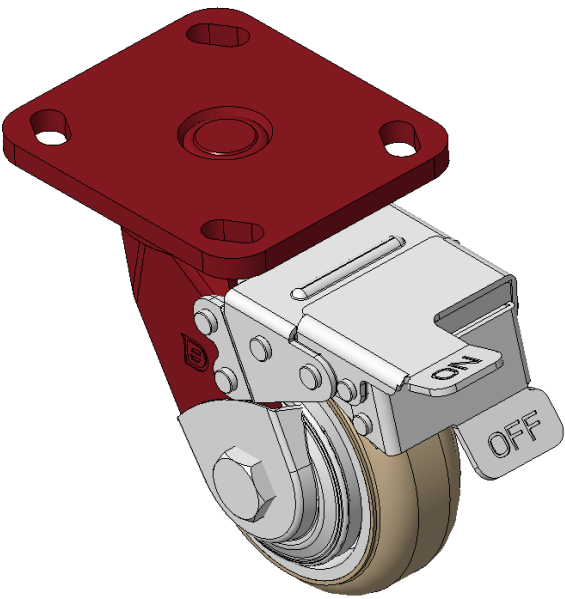

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 100mm                          |
| Wheel Width                                                            | 34mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 115 x 100mm                    |
| Bolt Hole Spacing                                                      | 85 x 70mm                      |
| Plate Hole                                                             | 20 x 11mm                      |
| Offset                                                                 | 40.5mm                         |
| Swivel Interference                                                    | 282mm                          |
| Overall Height                                                         | 147mm                          |
| Swivel Radius                                                          | 141mm                          |
| Hardness Of Tread                                                      | 85±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 200kgs                         |
| Load Capacity (Static)                                                 | 300kgs                         |
| Temperature                                                            | -20°C to +80°C                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 2.76kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

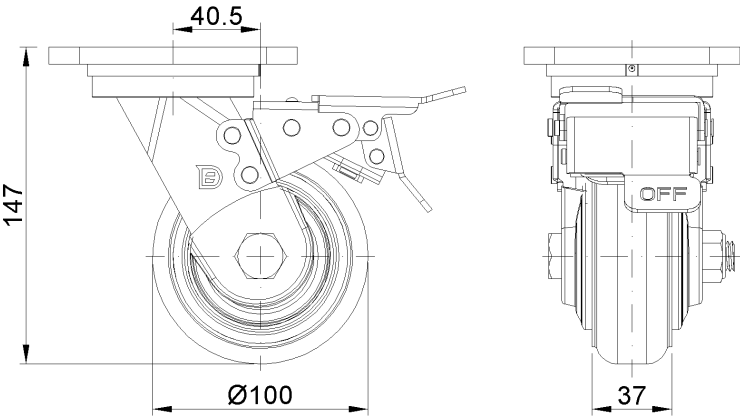

Mounting

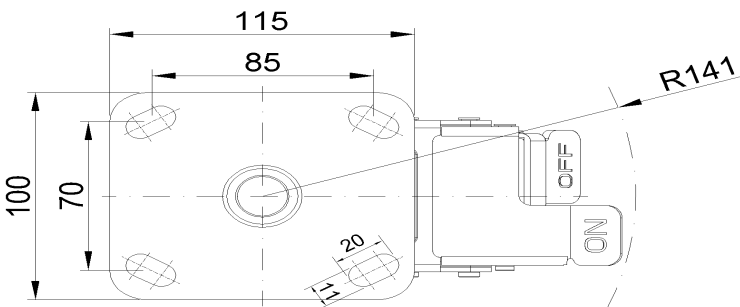

\* For any deviation between metric and imperial spec, please refer to the metric spec.