



1157 57 Series Caster Series

MRC (Transparent) Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11570400072041

Swivel Caster with Welded Caster Fork  
Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
Reinforced Polypropylene Wheel Center, natural Wheel Tread  
Bearing—Ball Bearing with special anti-twist wheel cover

Wheel tread: Thermoplastic (PA6)  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

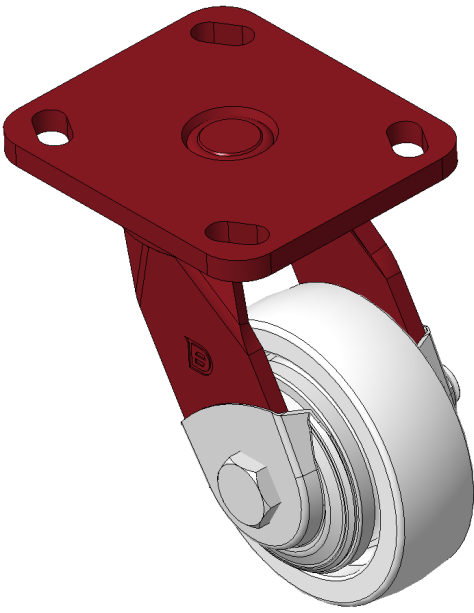

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 100mm                     |
| Wheel Width                                                            | 32mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 115 x 100mm               |
| Bolt Hole Spacing                                                      | 85 x 70mm                 |
| Plate Hole                                                             | 20 x 11mm                 |
| Offset                                                                 | 40.5mm                    |
| Swivel Interference                                                    | 186mm                     |
| Overall Height                                                         | 147mm                     |
| Swivel Radius                                                          | 93mm                      |
| Hardness Of Tread                                                      | 75±5° Shore D             |
| Load Capacity (Dynamic)                                                | 250kgs                    |
| Load Capacity (Static)                                                 | 375kgs                    |
| Temperature                                                            | -20°C to +80°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 2.11kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

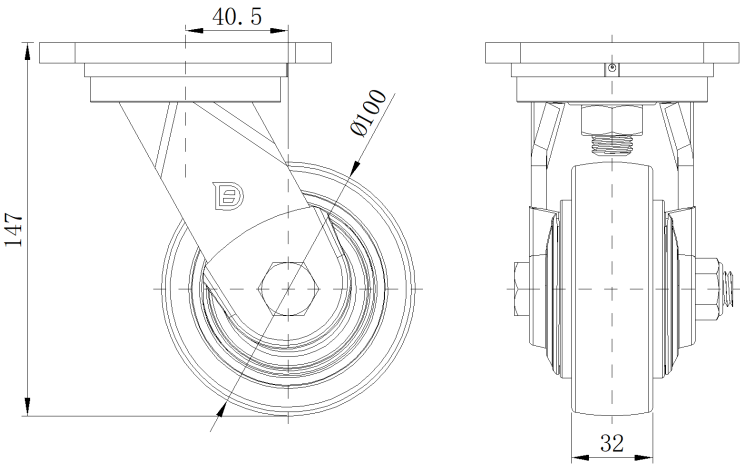

Mounting

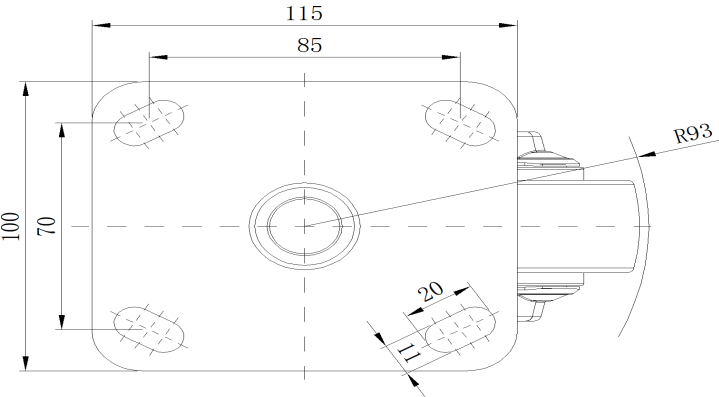

\* For any deviation between metric and imperial spec, please refer to the metric spec.