1157 57 Series Caster Series

PU (red flat) Wheel Diameter x Wheel Width 100 x 34mm

EAN

KS-11570400331031

Rigid Caster, Welded Caster Fork
Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing
Cast Iron core, High Quality Polyurethane Wheel Tread, Cast Iron red Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Standard

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 34mm

Wheels With Ball Bearings Wheel Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Overall Height 147mm Hardness Of Tread

250kgs Load Capacity (Dynamic)

Temperature Rigid Caster Fork Type Stainless N/A **Electrical Conductivity** N/A

93±5° Shore A Load Capacity (Static) 375kgs -20°C to +70°C N/A Anti-Static Weight 2.10kgs


ISO22883

Advantages at a glance


Rolling Resistance **Operating Noise**

Floor Surface Preservation • • • • •

Dimensions

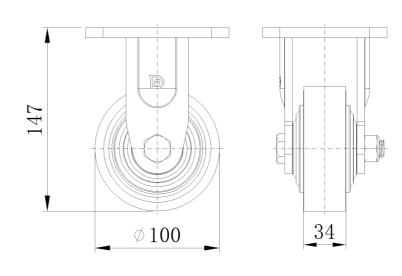

Mounting

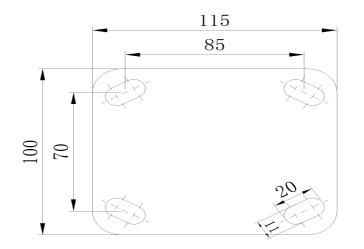

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.