1157 57 Series Caster Series

PU (Red arc) Wheel Diameter × Wheel Width 100 x 34mm

EAN

KS-11570400331131

Rigid Caster, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread, Cast Iron red Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 147mm

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster
Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.94kgs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

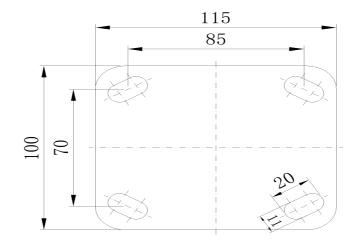

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.