



1157 57 Series Caster Series

PU (red round) Wheel Diameter x Wheel Width 100 x 34mm


EAN

KS-11570400334161

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

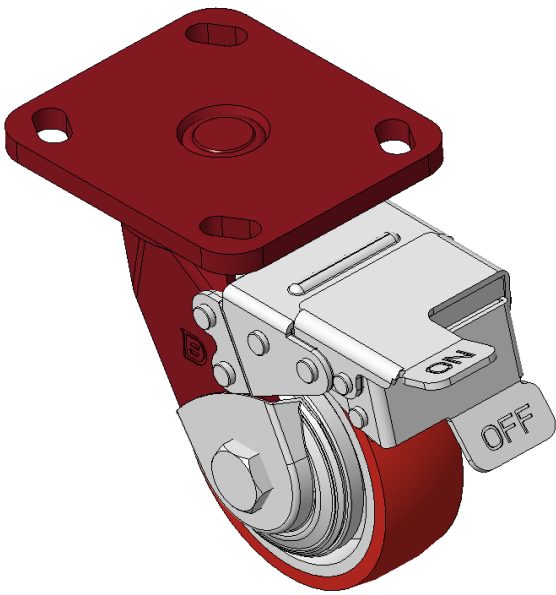

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 4 "                            |
| Wheel Width                                                            | 1-3/8 "                        |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 4-9/16 " x 4 "                 |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "              |
| Plate Hole                                                             | 13/16 " x 3/8 "                |
| Offset                                                                 | 1-5/8 "                        |
| Swivel Interference                                                    | 11-3/16 "                      |
| Overall Height                                                         | 5-7/8 "                        |
| Swivel Radius                                                          | 5-9/16 "                       |
| Hardness Of Tread                                                      | 93±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 551lbs                         |
| Load Capacity (Static)                                                 | 827lbs                         |
| Temperature                                                            | -4°F to +158°F                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 6.4lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

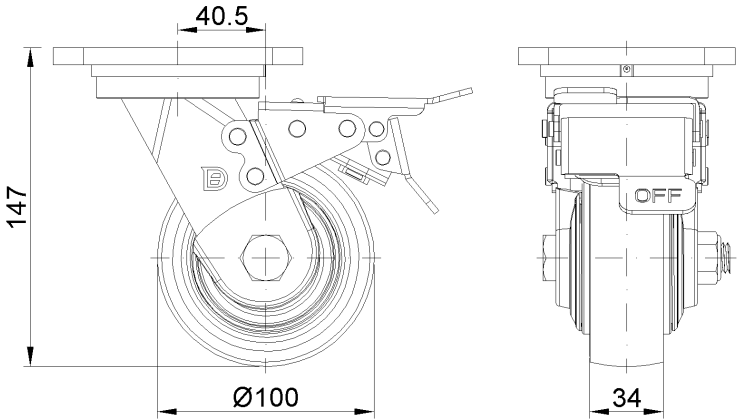

Mounting

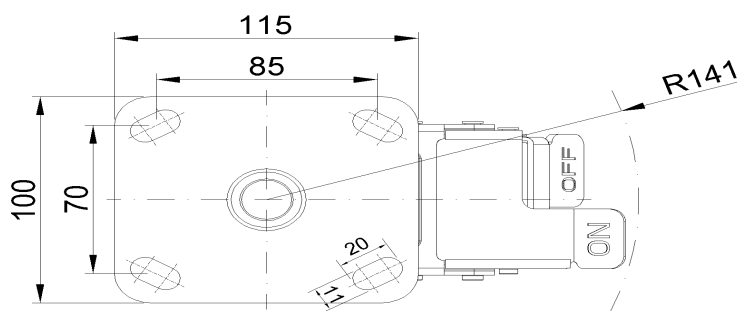

\* For any deviation between metric and imperial spec, please refer to the metric spec.