1157 57 Series Caster Series

QPU (brown flat) Wheel Diameter × Wheel Width 100 x 34mm

EAN


KS-11570400531021A

Rigid Caster, Welded Caster Fork Red painted surface, Top Plate Mounting Type, Hole spacing 85x70 Cast Iron Wheel Center, high quality polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel tread: High quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Imperial O Met	ric
----------------	-----

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 5-7/8 "

Overall Height 5-7/8 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

S226 Chole A

849lbs

1273lbs

-4°F to +158°F

Rigid Caster

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.7lbs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

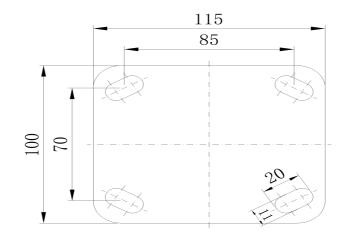

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.