# 1157 57 Series Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm

EAN


KS-11570400531121A

Rigid Caster, Welded Caster Fork Red painted surface, Top Plate Mounting Type, Hole spacing 85x70 Cast Iron Wheel Center, high quality polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel tread: High quality polyurethane wheel tread

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

Wheel Width

● Metric ○ Imperial

Wheel Diameter 100mm

Wheel Bearing Wheels With Ball Bearings

34mm

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 147mm

Hardness Of Tread 92±5° Shore A

Tialdiess of Tread 9213 Shore

Load Capacity (Dynamic)335kgsLoad Capacity (Static)502.5kgsTemperature-20°C to +70°CFork TypeRigid CasterStainlessN/AElectrical ConductivityN/A

Anti-Static N/A
Weight 2.10kgs
Standard ISO22883


### Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

#### **Dimensions**

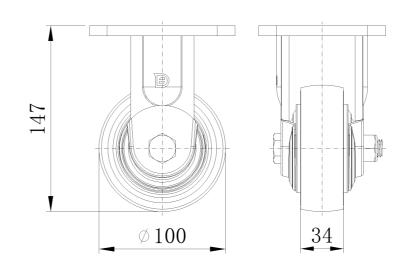

## Mounting

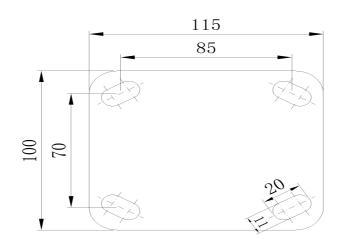

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.