# 1157 57 Series Caster Series

QPU (brown flat) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11570400534031

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

#### ● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 40.5mm 282mm Swivel Interference Overall Height 147mm **Swivel Radius** 141mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 385kgs
Load Capacity (Static) 577.5kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight2.90kgsStandardISO22883


### Advantages at a glance

Rolling Resistance • •


Operating Noise • • • •

Floor Surface Preservation • • • • •

### Dimensions

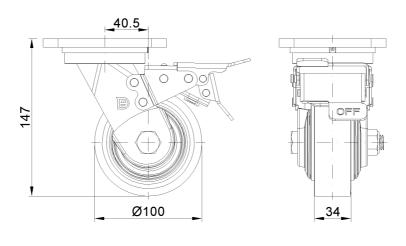

## Mounting

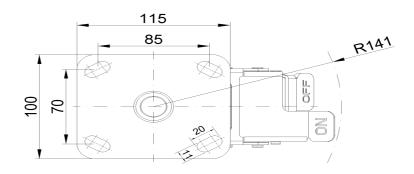

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.