## 1157 57 Series Caster Series

QPU (brown flat) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11570400534031

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

### ● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 4-9/16 " x 4 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Offset
 1-5/8 "

 Swivel Interference
 11-3/16 "

 Overall Height
 5-7/8 "

 Swivel Radius
 5-9/16 "

Load Capacity (Dynamic) 849lbs
Load Capacity (Static) 1273lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

92±5° Shore A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.4lbs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

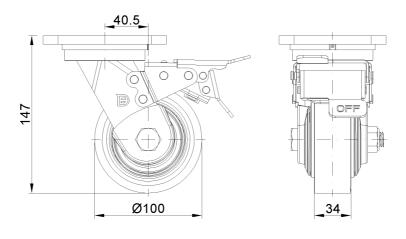

# Mounting

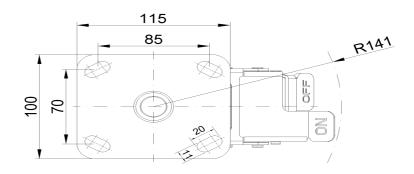

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.