## 1157 57 Series Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11570400534121

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings – Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 11-3/16 "

Overall Height 5-7/8 "

Swivel Radius 5-9/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 739lbs

Load Capacity (Static) 1108lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight6.3lbsStandardISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

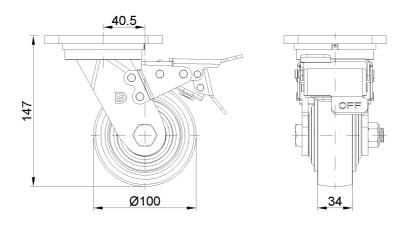

# Mounting

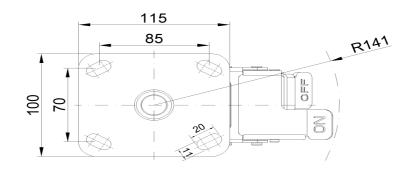

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.