## 1157 57 Series Caster Series

# Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11570400534151

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 034mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 120 x 90mm **Bolt Hole Spacing** 90 x 60mm Plate Hole 12mm Offset 40.5mm 282mm Swivel Interference Overall Height 147mm Swivel Radius 141mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 385kgs
Load Capacity (Static) 577.5kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.08kgs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

### Dimensions

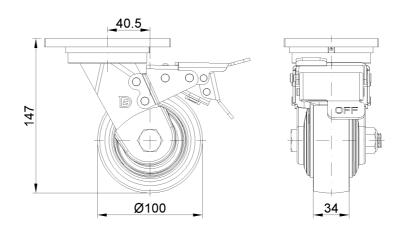

## Mounting

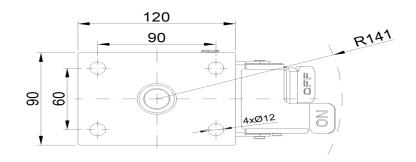

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.