1157 57 Series Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11570400534151

Casters with front brake and With locking system, Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 90x60 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing
Wheels With Ball Bearings
Plate Size
4-13/16 " x 3-9/16 "

Bolt Hole Spacing 3-9/16 " x 2-3/8 "

Plate Hole 1/2 "

Offset 1-5/8 "

Swivel Interference 11-3/16 "

Overall Height 5-7/8 "

Swivel Radius 5-9/16 "

Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 849lbs

Load Capacity (Static) 1273lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.8lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


••••

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions



Mounting

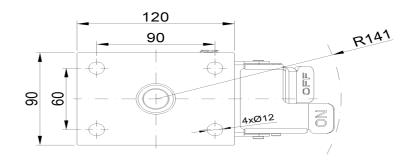

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.