



1157 57 Series Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 100 x 22 (46.5) mm


EAN

KS-11570400801031

Rigid Caster with Welded Caster Fork Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—special Ball Bearing for reduced Rolling Resistance ZQPU Dual Wheels, Ergonomic design for easier starting and turning

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

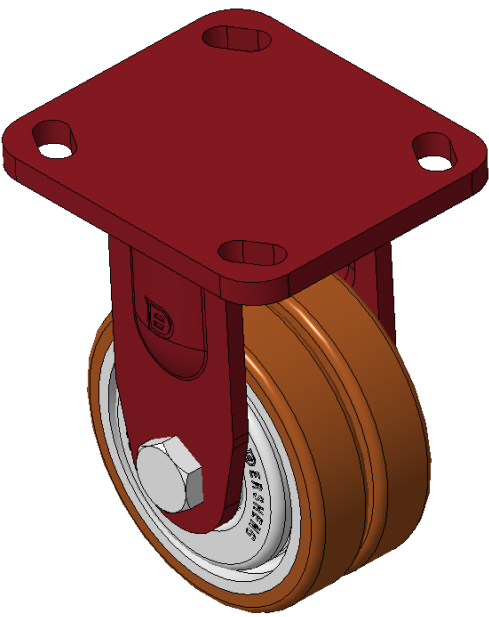

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 4 "                       |
| Wheel Width                                                            | 1-7/8                     |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 4-9/16 " x 4 "            |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "         |
| Plate Hole                                                             | 13/16 " x 3/8 "           |
| Overall Height                                                         | 5-7/8 "                   |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 739lbs                    |
| Load Capacity (Static)                                                 | 1108lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 6.0lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

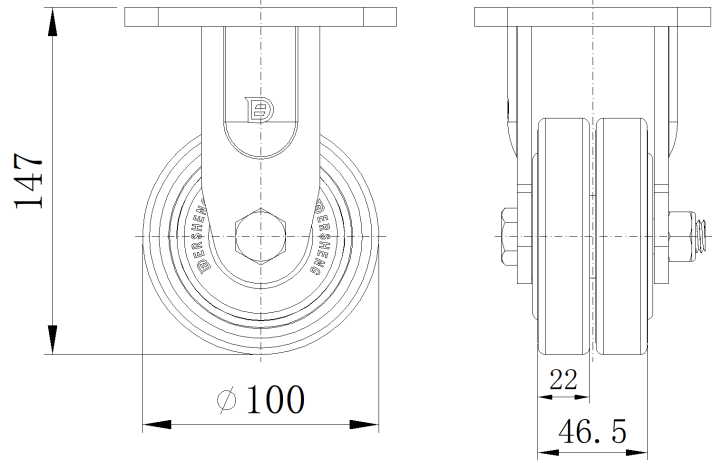

Mounting

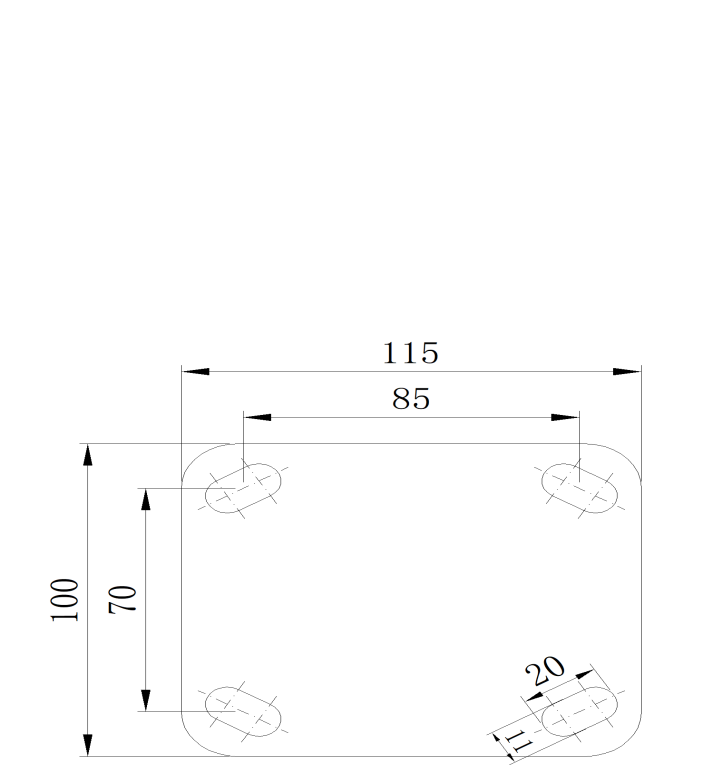

\* For any deviation between metric and imperial spec, please refer to the metric spec.