


1157 57 Series Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11570500071051

Rigid Caster, Welded Caster Fork, red painted finish Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Reinforced Polypropylene, natural wheel tread Bearing—Ball Bearing

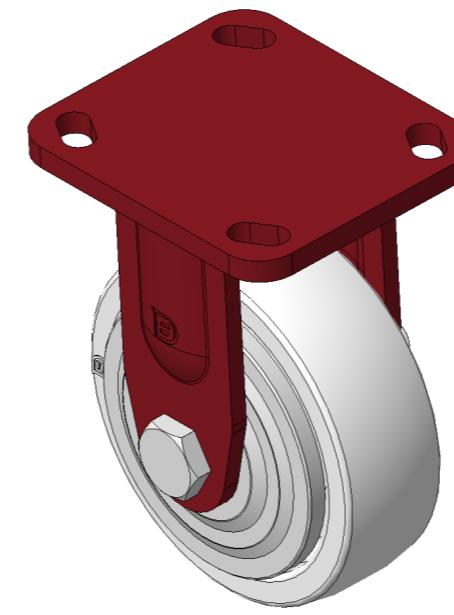

Picture may differ from original product

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Technical Data

Imperial Metric

Wheel Diameter

5 "

Wheel Width

1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-9/16 " x 4 "

Bolt Hole Spacing

3-3/8 " x 2-3/4 "

Plate Hole

13/16 " x 3/8 "

Overall Height

6-1/2 "

Hardness Of Tread

75±5° Shore D

Load Capacity (Dynamic)

661lbs

Load Capacity (Static)

992lbs

Temperature

-4°F to +176°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

5.0lbs

Standard

ISO22883

Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



Dimensions

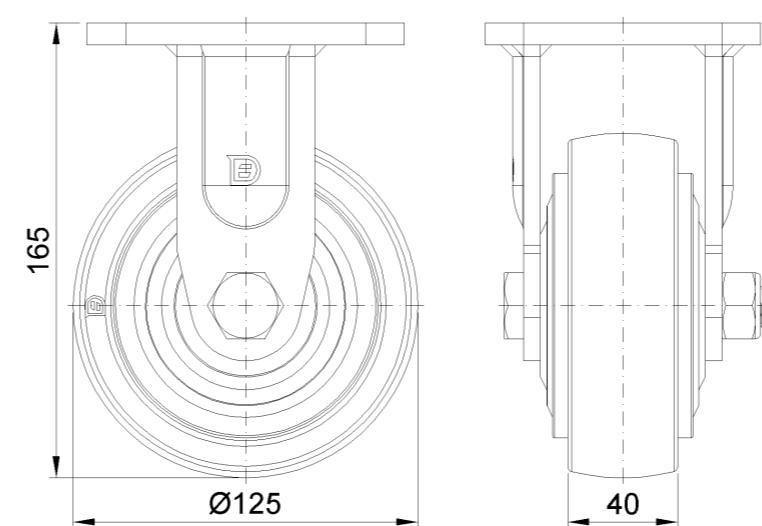

Mounting

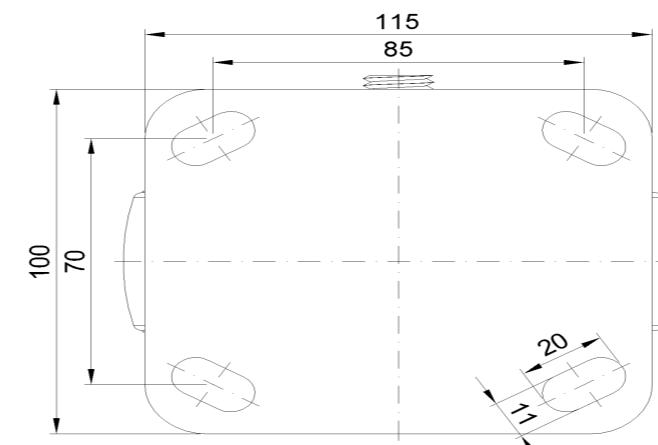

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com