

1157 57 Series Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11570500072011

Swivel Caster, Welded Caster Fork, red painted finish
 Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
 Reinforced Polypropylene Wheel Center, natural Wheel Tread
 Bearing - Ball Bearing

Wheel tread: Thermoplastic (PA6)
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

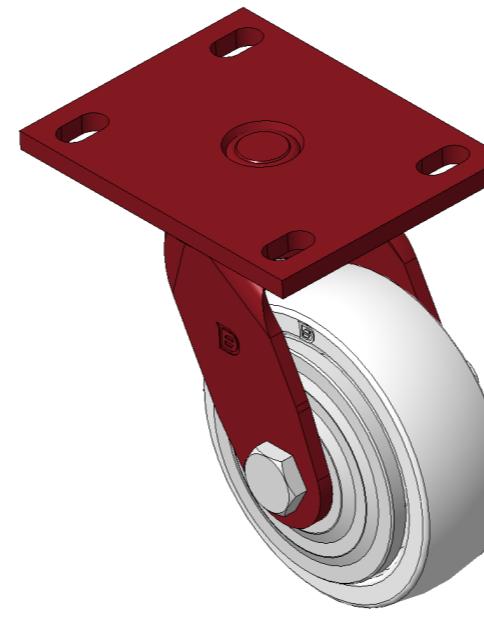

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 1-11/16 "

Swivel Interference 8-1/2 "

Overall Height 6-13/16 "

Swivel Radius 4-1/4 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.1lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

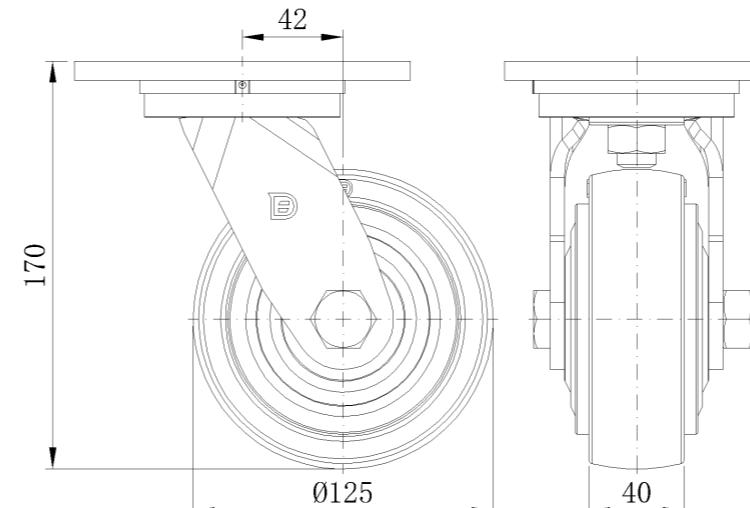

Mounting

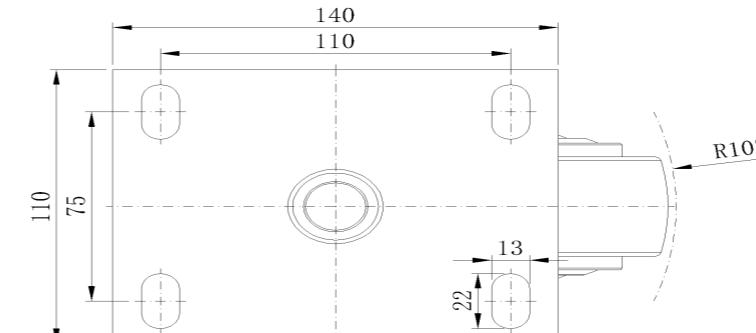

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com