

## 1157 57 Series Caster Series

PU (red round) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11570500334131

Front Brake locking system, Welded Caster Fork  
 Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red  
 Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

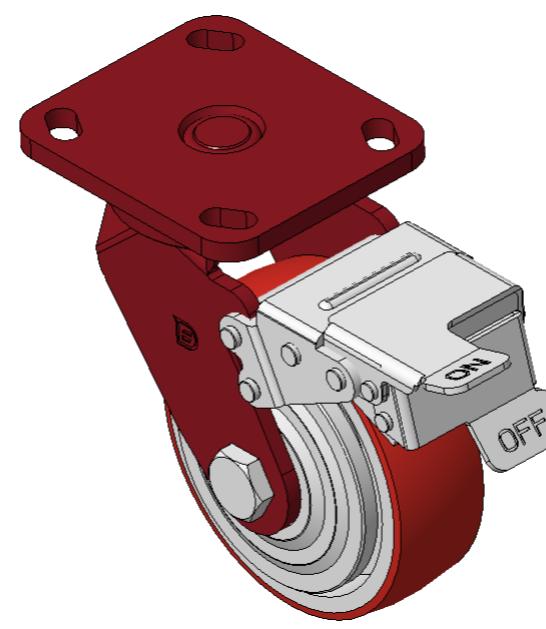

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	45mm
Swivel Interference	316mm
Overall Height	170mm
Swivel Radius	158mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	340kgs
Load Capacity (Static)	510kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.76kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • ○ ○
Operating Noise	• • • • ○
Floor Surface Preservation	• • • • ○

## Dimensions

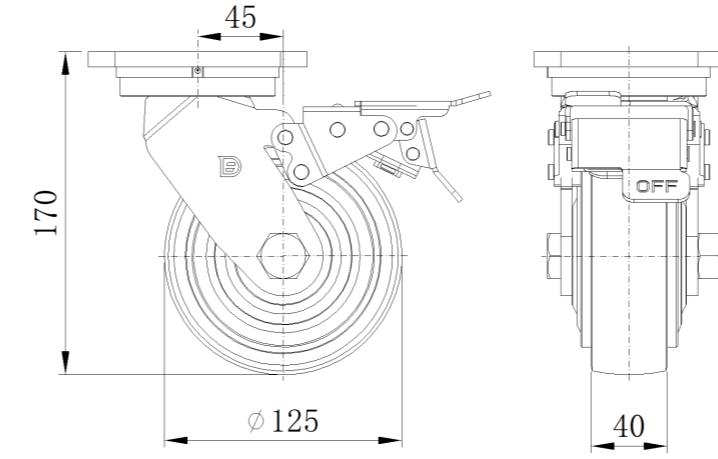

## Mounting

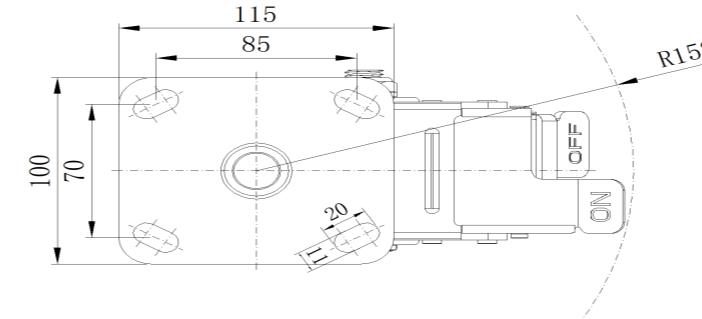

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com