



1157 57 Series Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 125 x 24 (51) mm


EAN

KS-11570500804071

Front Brake locking system, Welded Caster Fork  
Red painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
Bearings—special Ball Bearings for reduced Rolling Resistance  
ZQPU dual wheels, Ergonomic design designally designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

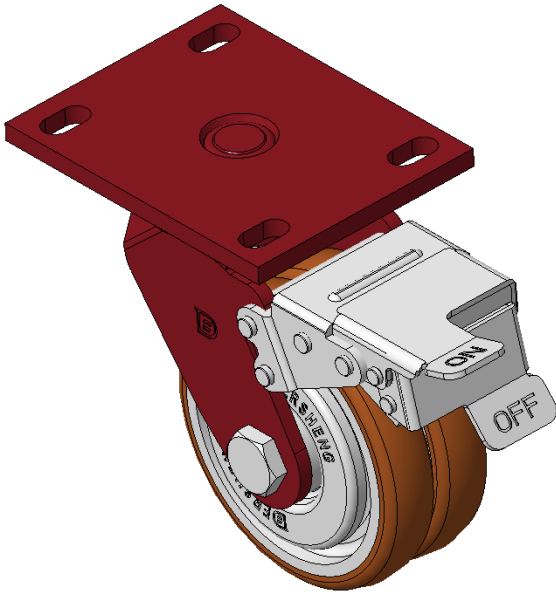

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 125mm                          |
| Wheel Width                                                            | 51mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 140 x 110mm                    |
| Bolt Hole Spacing                                                      | 110x75mm                       |
| Plate Hole                                                             | 22 x 13mm                      |
| Offset                                                                 | 45mm                           |
| Swivel Interference                                                    | 316mm                          |
| Overall Height                                                         | 170mm                          |
| Swivel Radius                                                          | 158mm                          |
| Hardness Of Tread                                                      | 92±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 450kgs                         |
| Load Capacity (Static)                                                 | 675kgs                         |
| Temperature                                                            | -20°C to +70°C                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 4.34kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

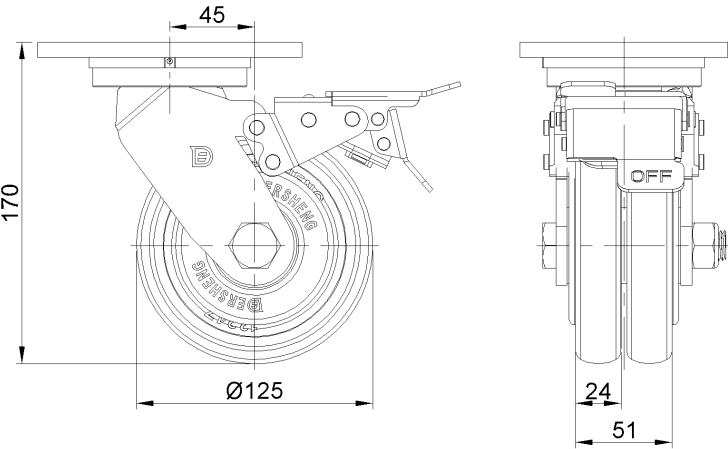

Mounting

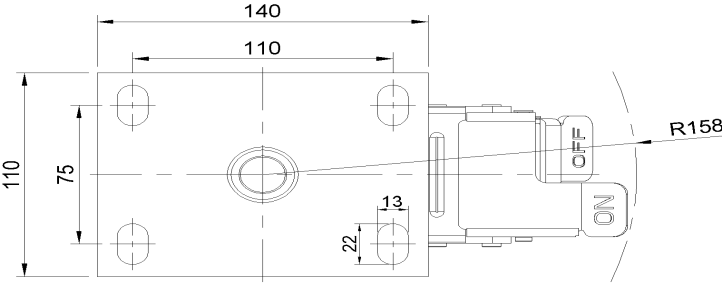

\* For any deviation between metric and imperial spec, please refer to the metric spec.