

## 1157 57 Series Caster Series

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11570600044011

Casters with front brake and With locking system, Welded Caster Fork  
 Red painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing  
 Cast Iron Wheel Center, High-Quality, highly Resilient Rubber Wheel Tread, Cast Iron in  
 natural color  
 Bearings—Ball Bearings

Wheel surface: Made of high-quality and highly elastic rubber  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

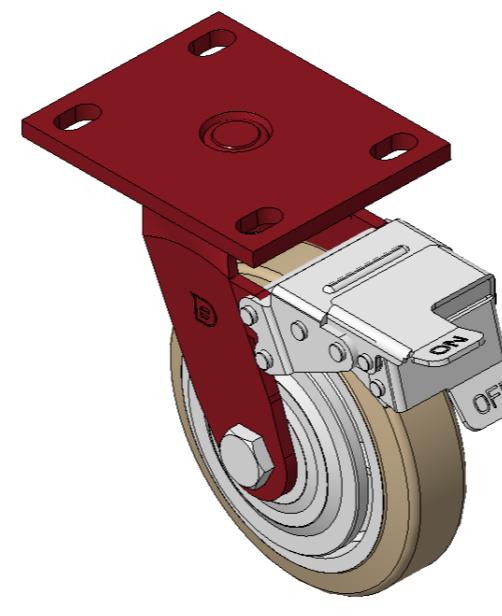

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	22 x 13mm
Offset	42mm
Swivel Interference	320mm
Overall Height	197mm
Swivel Radius	160mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.38kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • ○ ○
Operating Noise	• • • • ○
Floor Surface Preservation	• • • • ○

## Dimensions

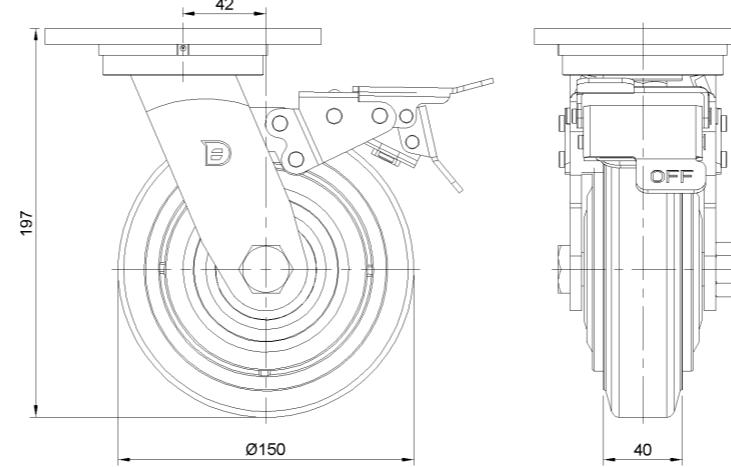

## Mounting

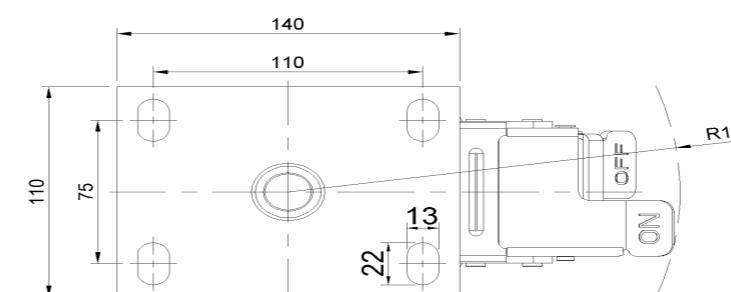

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com