

1157 57 Series Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 150 x 40mm

EAN


KS-11570600071011

Rigid Caster, Welded Caster Fork Surface sprayed with red paint, Mounting Type - Top Plate, Hole spacing 110x75 Reinforced Polypropylene, Wheel Tread Natural Color Bearing-Ball Bearing

Wheel tread: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

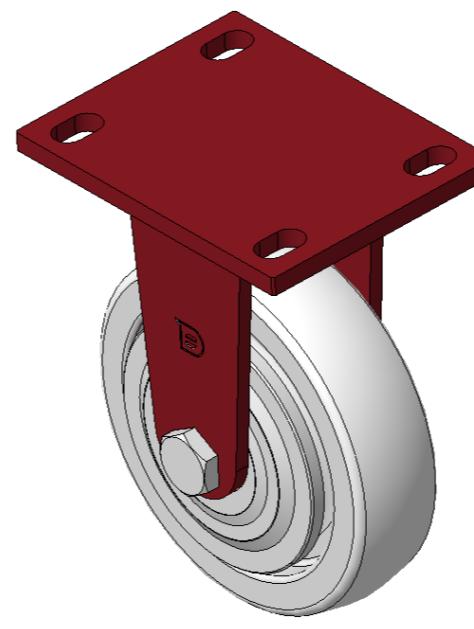

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 150mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 22 x 13mm

Overall Height 197mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.38kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

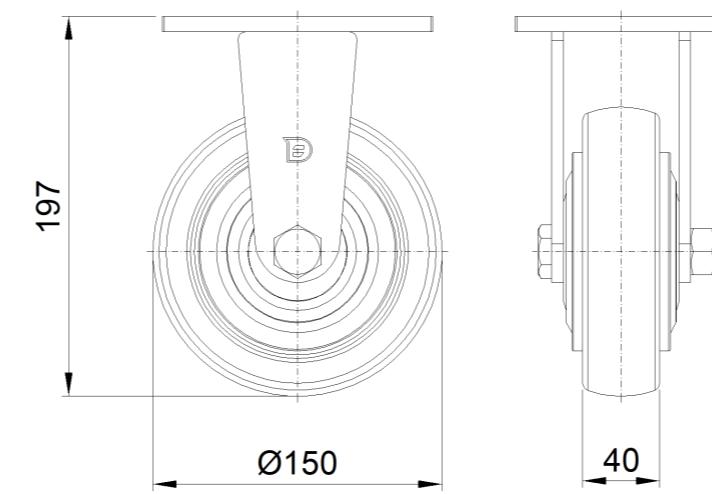

Mounting

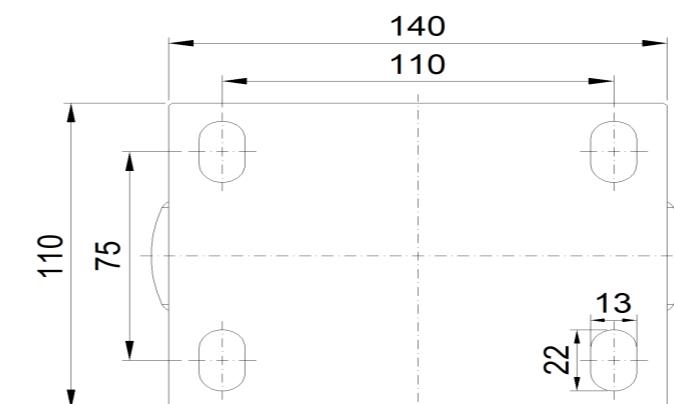

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com