

## 1157 57 Series Caster Series

MRC (Transparent) Wheel Diameter x Wheel Width 150 x 40mm

EAN

KS-11570600072021

Swivel Caster, Welded Caster Fork, red paint finish  
 Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Reinforced Polypropylene Wheel Center, natural color Wheel Tread  
 Bearings—Ball Bearings

Wheel tread: Thermoplastic (PA6)  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	42mm
Swivel Interference	238mm
Overall Height	197mm
Swivel Radius	119mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	400kgs
Load Capacity (Static)	600kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.60kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

## Dimensions

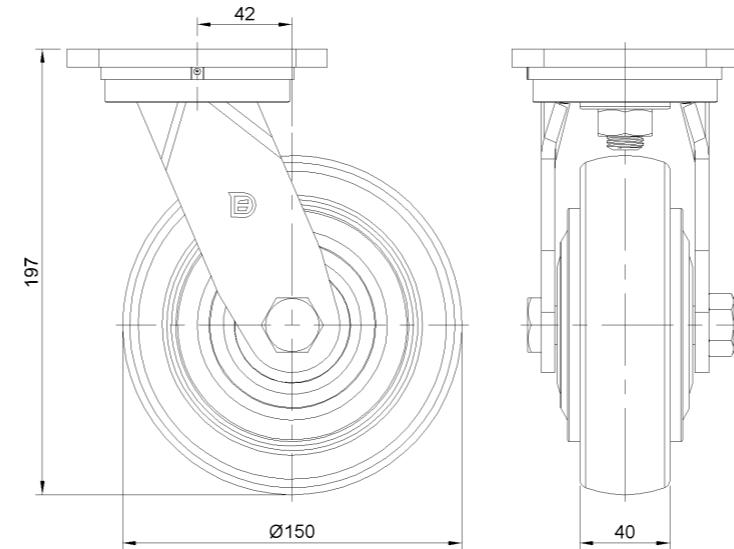

## Mounting

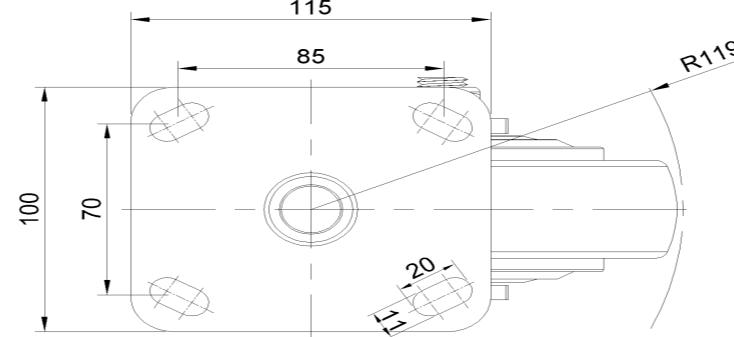

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com