

## 1157 57 Series Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11570600542171

Swivel Caster with Welded Caster Fork  
 Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearing—Ball Bearing with special anti-wrap cap

Wheel tread: Made of high-quality polyurethane  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

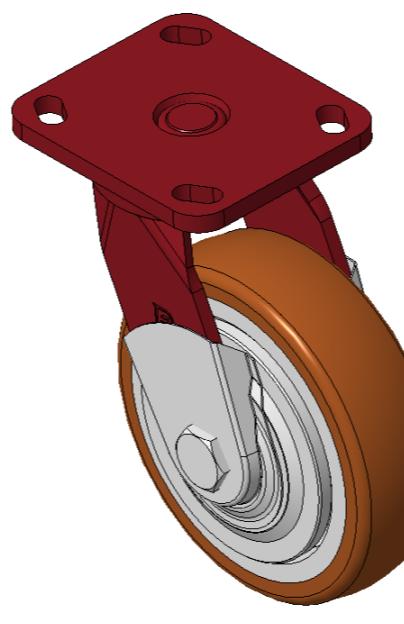

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	150mm
Wheel Width	42mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 110mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	42mm
Swivel Interference	238mm
Overall Height	197mm
Swivel Radius	119mm
Hardness Of Tread	94±5° Shore A
Load Capacity (Dynamic)	670kgs
Load Capacity (Static)	1005kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.30kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	• • • • ○
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

### Dimensions

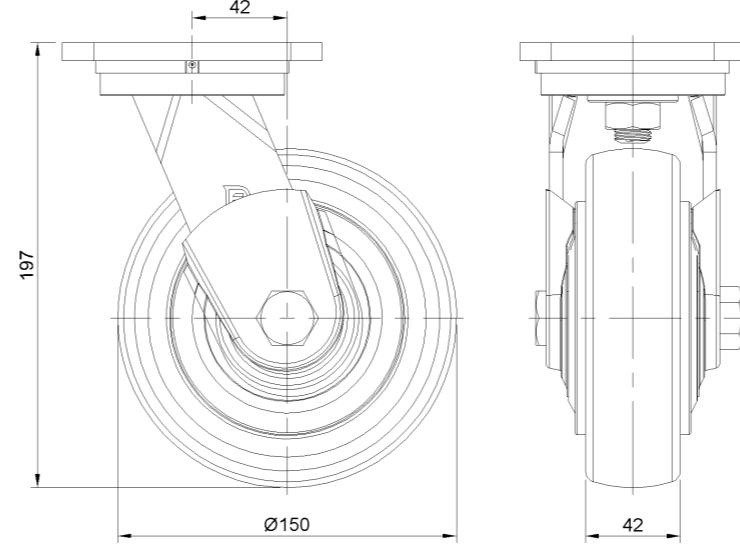

### Mounting

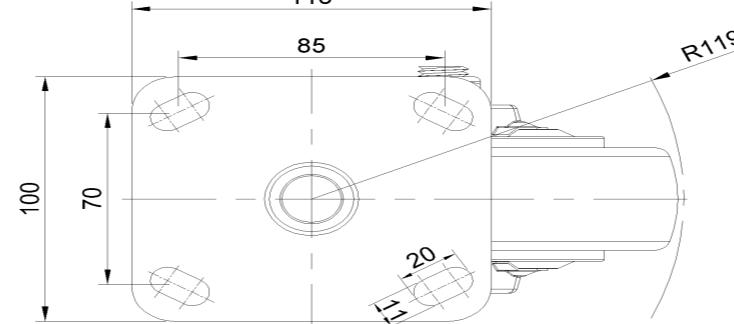

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com