


## 1157 57 Series Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 150 x 24 (51) mm

EAN

KS-11570600804081

Front Brake locking system, Welded Caster Fork  
 Red painted finish, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearings—special Ball Bearings for reduced Rolling Resistance  
 ZQPU dual wheels, Ergonomic design designed for easier starting and turning

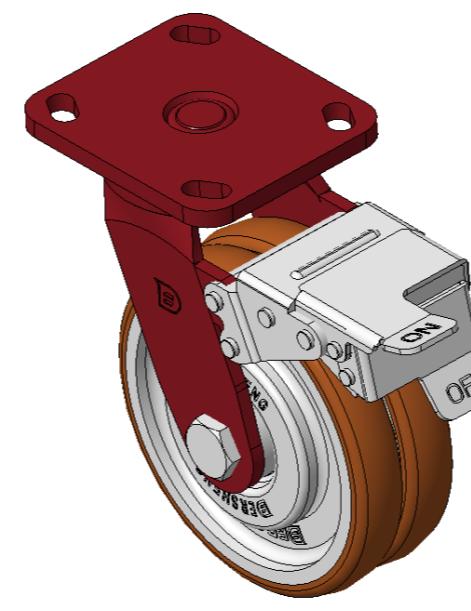

Picture may differ from original product

Drawings are for reference only and may differ from the product

## Technical Data


 Metric  Imperial

Wheel Diameter	150mm
Wheel Width	51mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 110mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	42mm
Swivel Interference	320mm
Overall Height	197mm
Swivel Radius	160mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	550kgs
Load Capacity (Static)	825kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	5.43kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

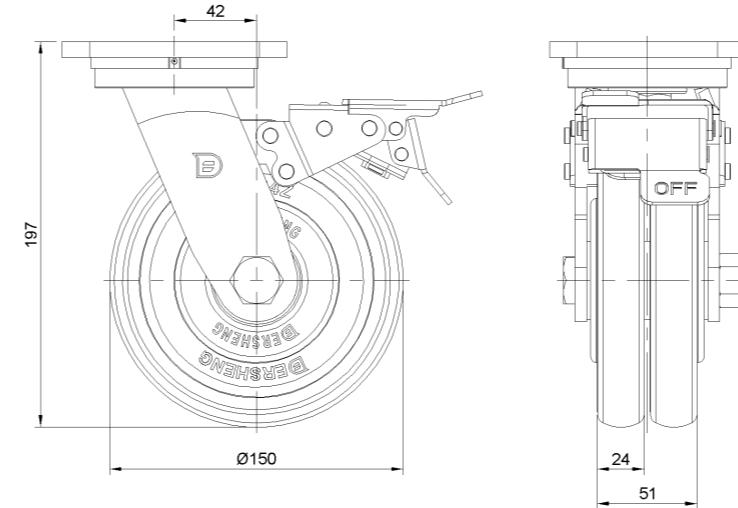

## Mounting

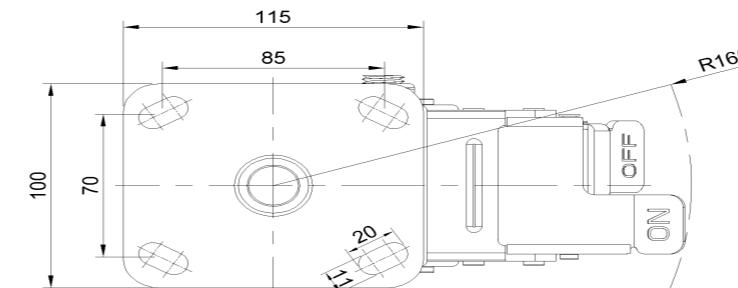

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com