

1157 57 Series Caster Series

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 200 x 44mm

EAN


KS-11570800041051

Rigid castors, Welded Caster Fork Surface sprayed with red paint, Top Plate installation device, Hole spacing 85x70 Cast Iron Wheel Center, high quality and high Resilient Rubber Wheel Tread, Cast Iron in original color Bearing—Ball Bearing

Wheel Tread: high quality and high elastic rubber wheel surface

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

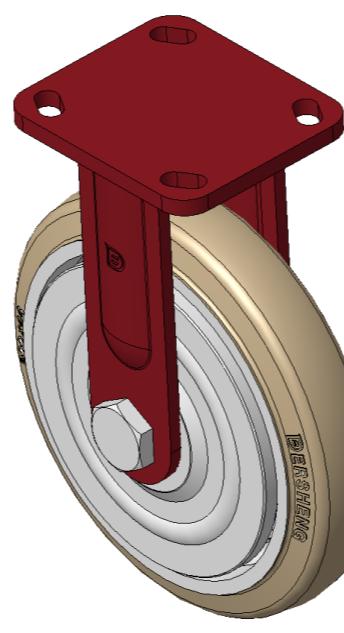

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 8 "

Wheel Width 1-3/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 9-15/16 "

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature -4°F to +176°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.6lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

Dimensions

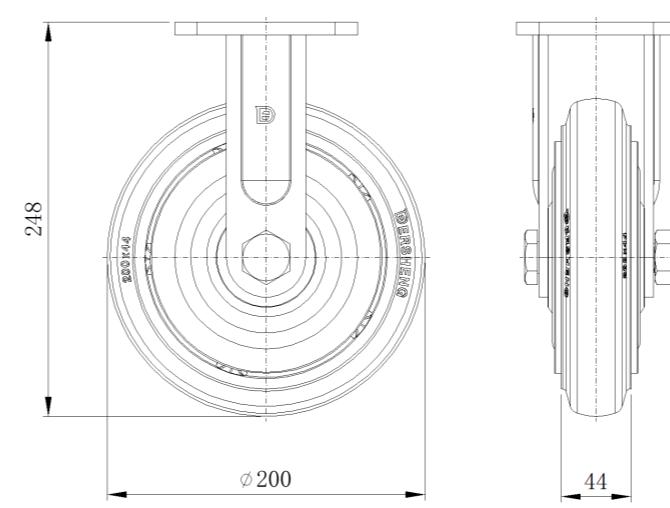

Mounting

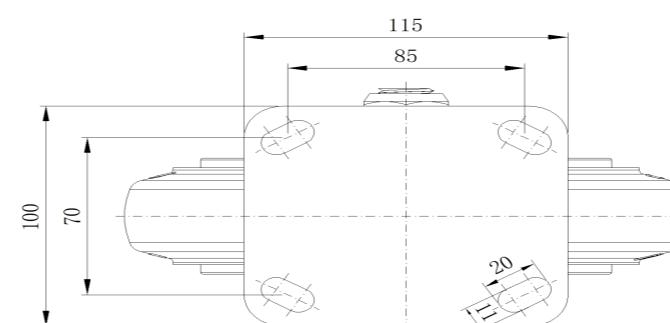

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com