

1160 UNI Series-Light Duty Caster Series (All Plastic)

PPR (black and black) Wheel Diameter x Wheel Width 80 x 24mm


EAN

KS-11602300267053

Adjustable Casters, mortise-and-tenon Stamping Fork— $\varnothing 11 \times 22L$
 White legs are made of polyamide reinforced material.
 Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation.
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
 Black, wheels—Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)
 Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

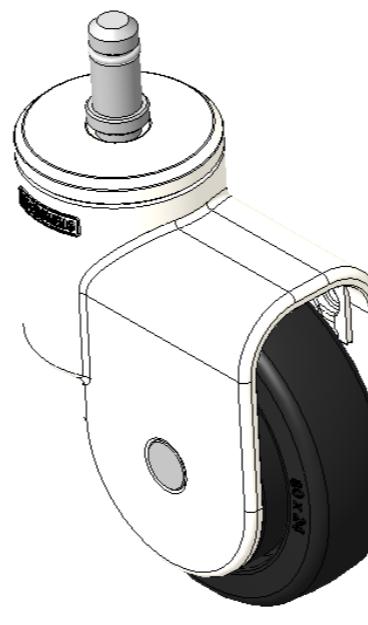

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 80mm

Wheel Width 24mm

Wheel Bearing Wheel With Plain Bearing

Stem Diameter 11mm

Stem Length 22mm

Offset 34mm

Swivel Interference 149mm

Overall Height 109.5mm

Swivel Radius 74.5mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 40kgs

Load Capacity (Static) 60kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.24kgs

Standard ISO22881


Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

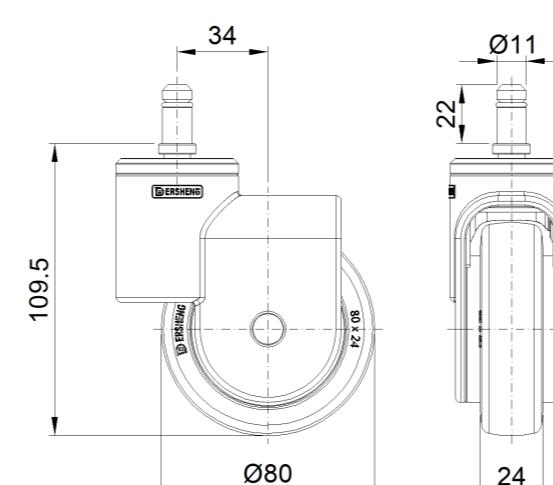

Mounting

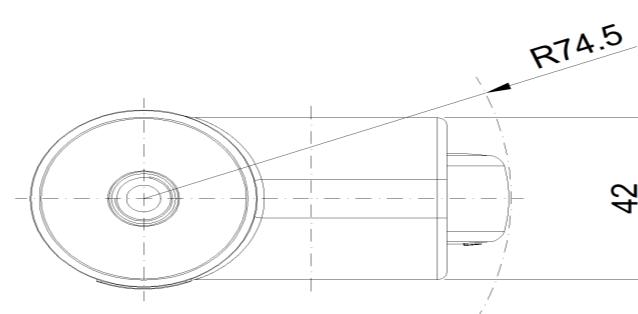

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com