


1161 Automatic Cable Locking Caster Series

E-conductive wheel (white light gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11610500171023

Actual Casters, 75x45 angled perforated Top Plate
 White legs reinforced with polyamide, Mounting Type - Top Plate
 Rust-proof, Corrosion resistant, Attractive appearance, Smooth rotation, and conductive
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
 Polypropylene Rubber (TPR) Wheel Tread
 White and dark gray, Bearing—Ball Bearings

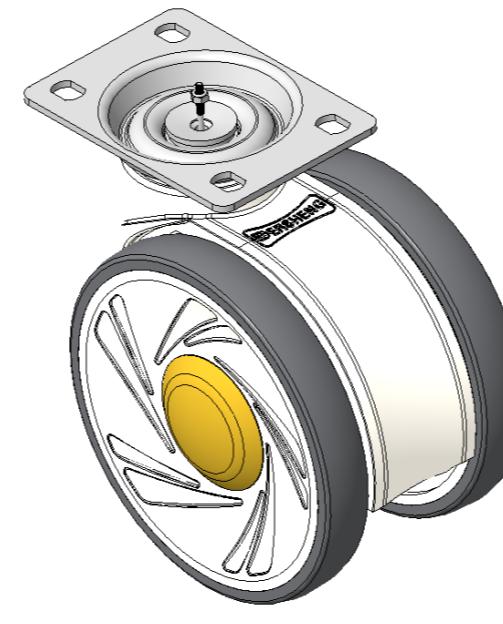

Wheel tread: Thermoplastic rubber elastomer (TPR)
 Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Imperial Metric

Wheel Diameter	5 "
Wheel Width	11/16
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-7/8 " x 2-3/4 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	3/8 " x 3/8 "
Offset	1-5/8 "
Overall Height	5-7/8 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	243lbs
Load Capacity (Static)	364lbs
Temperature	-4°F to +140°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	Y 10 ³ /~10 ⁴ /Ω
Anti-Static	N/A
Weight	1.9lbs
Standard	ISO22881


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

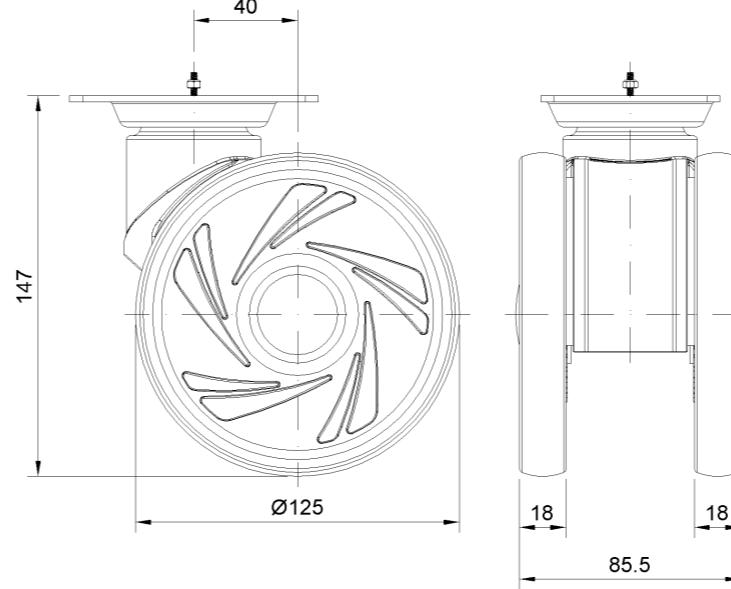

Mounting

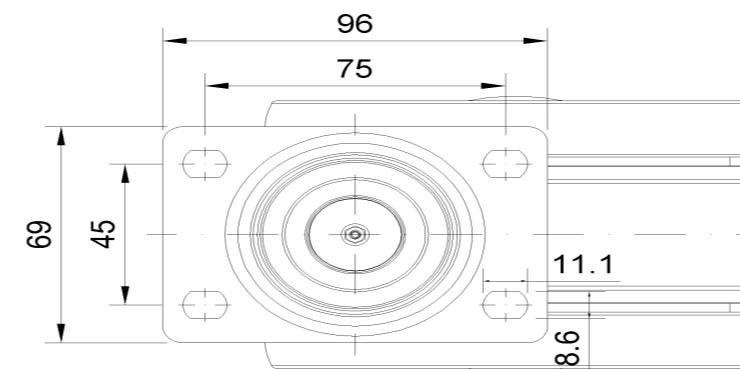

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com