

## 1161 Automatic Cable Locking Caster Series

E-conductive wheel (white light gray) Wheel Diameter x Wheel Width 125 x 18mm


EAN

KS-11610500172023

Swivel Casters, 75x45 angled hole Top Plate  
 White legs with polyamide-reinforced Mounting Type - Top Plate  
 Rust-proof, Corrosion resistant, Attractive appearance, Smooth rotation, and conductive  
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced  
 Polypropylene Rubber (TPR) Wheel Tread  
 White/dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
 Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

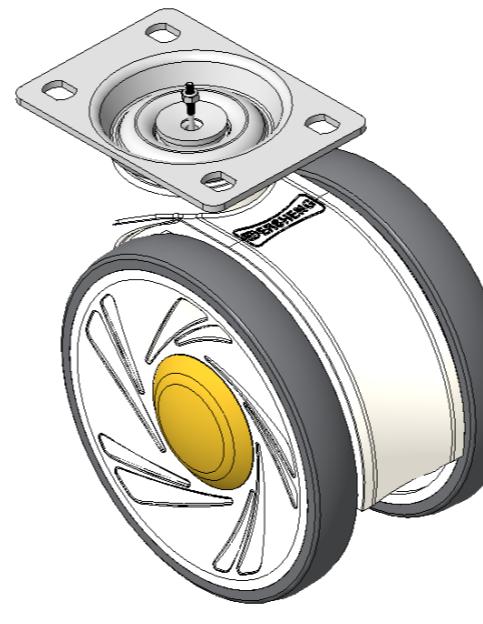

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	125mm
Wheel Width	85mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	96 x 69mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	11.1 x 8.6mm
Offset	40mm
Swivel Interference	220mm
Overall Height	146mm
Swivel Radius	110mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	110kgs
Load Capacity (Static)	165kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	Y 10^3/~10^4/Ω
Anti-Static	N/A
Weight	0.91kgs
Standard	ISO22881


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

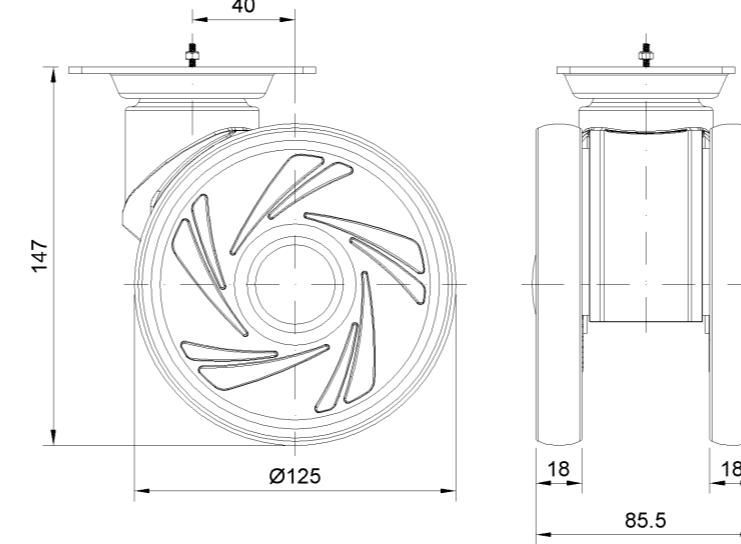

## Mounting

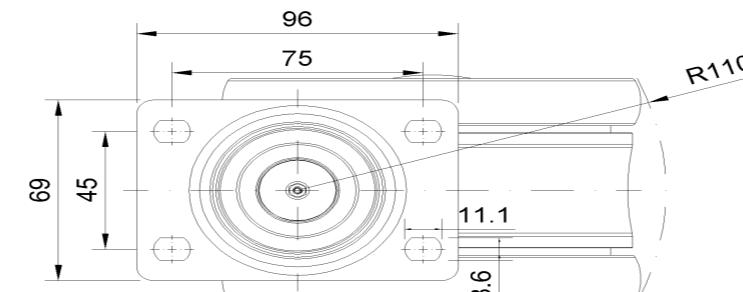

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com