

1161 Automatic Cable Locking Caster Series

E-conductive wheel (white dark gray) Wheel Diameter x Wheel Width 120 x 18mm

EAN

KS-11610500454023

Casters equipped with a double-Wheel locking system, 75x45 angled perforated Top Plate
 White legs made of polyamide reinforced material
 Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
 Gray, Bearing — Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


 Metric Imperial

| | |
|-------------------------|--------------------------------|
| Wheel Diameter | 125mm |
| Wheel Width | 85.5mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 96 x 69mm |
| Bolt Hole Spacing | 75 x 45mm |
| Plate Hole | 11 x 8.6mm |
| Offset | 40mm |
| Swivel Interference | 220mm |
| Overall Height | 147mm |
| Swivel Radius | 110mm |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 110kgs |
| Load Capacity (Static) | 165kgs |
| Temperature | -20°C to +60°C |
| Fork Type | Swivel Caster With Total Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.94kgs |
| Standard | ISO22881 |


Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

Dimensions

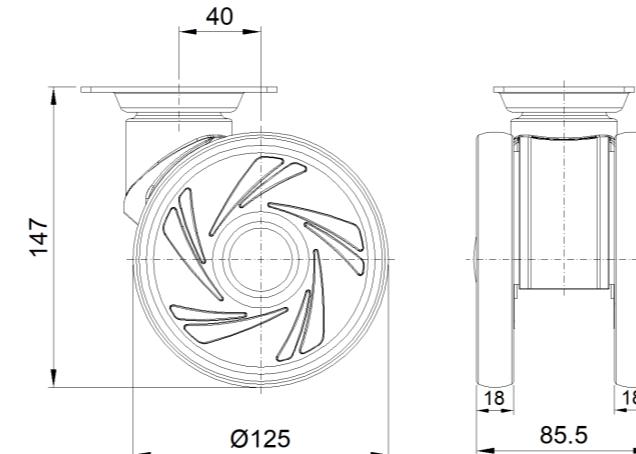

Mounting

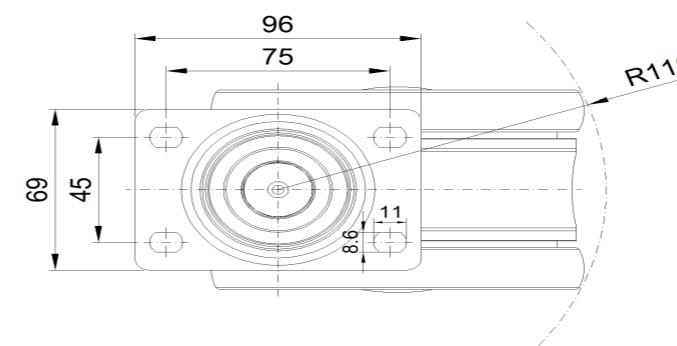

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com