

1162D Super Heavy Duty Casters Series (Double Wheel)




MC Nylon Wheel (Off-White) Wheel Diameter×Wheel Width 200×65mm

EAN  
KS-11620800071311

Rigid Casters, Welded Caster Fork, blue paint finish. Base plate Mounting Type device, 210x160mm Bolt Hole Spacing. Reinforced Polypropylene Wheel Center and Wheel Tread, off-white. Bearing—skew ball bearing.

Wheel surface: thermoplastic  
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

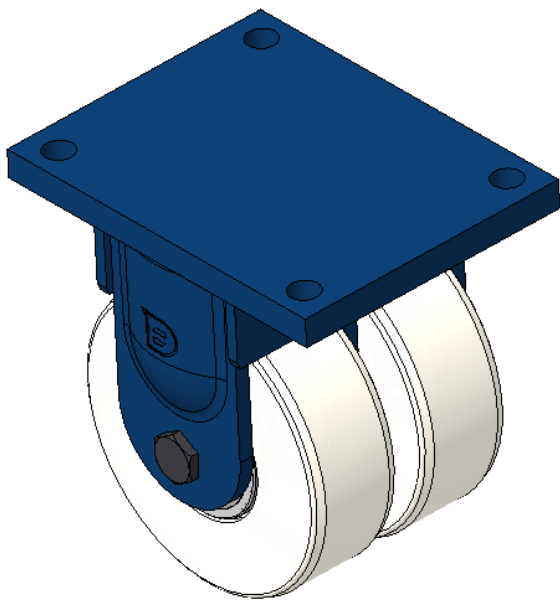

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 200mm                     |
| Wheel Width                                                            | 150mm                     |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 255 x 200mm               |
| Bolt Hole Spacing                                                      | 210 x 160mm               |
| Plate Hole                                                             | 21mm                      |
| Overall Height                                                         | 260mm                     |
| Hardness Of Tread                                                      | 82±5° Shore D             |
| Load Capacity (Dynamic)                                                | 4500kgs                   |
| Load Capacity (Static)                                                 | 6750kgs                   |
| Temperature                                                            | -25°C to +80°C            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 19.37kgs                  |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

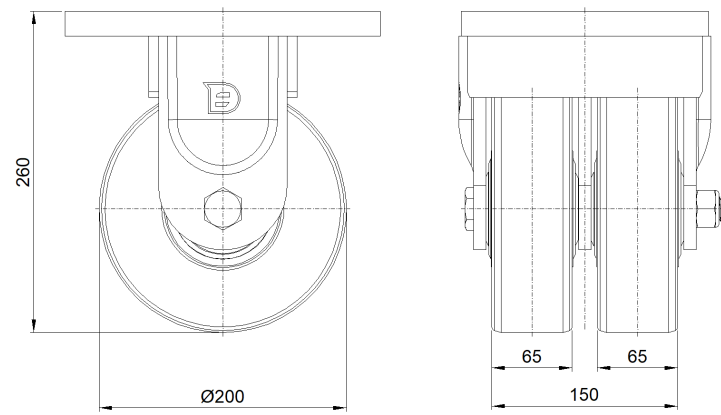

Mounting

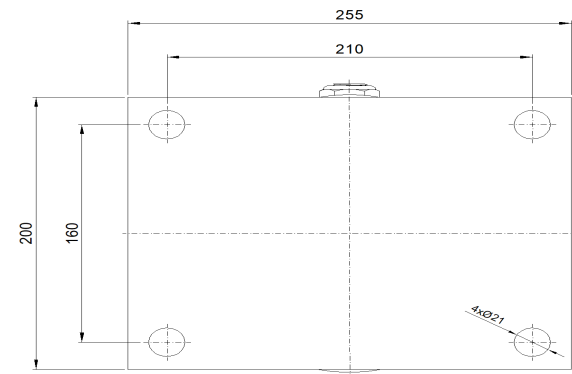

\* For any deviation between metric and imperial spec, please refer to the metric spec.