


## 1162 Super Heavy Duty Casters Series (Single Wheel)

VXPU (burgundy round) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11620800691011

Rigid Caster with Welded Caster Fork, blue painted finish. Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing. Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron burgundy. Bearing: Taper Roller Bearing.

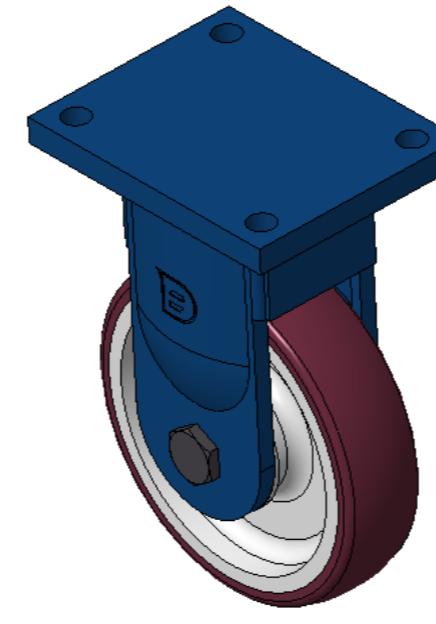

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter 8 "

Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 7 " x 5-9/16 "

Bolt Hole Spacing 5-1/2"x4-1/8"

Plate Hole 11/16 "

Overall Height 11-1/16 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 2205lbs

Load Capacity (Static) 3307lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 25.6lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance ● ● ● ○ ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

## Dimensions

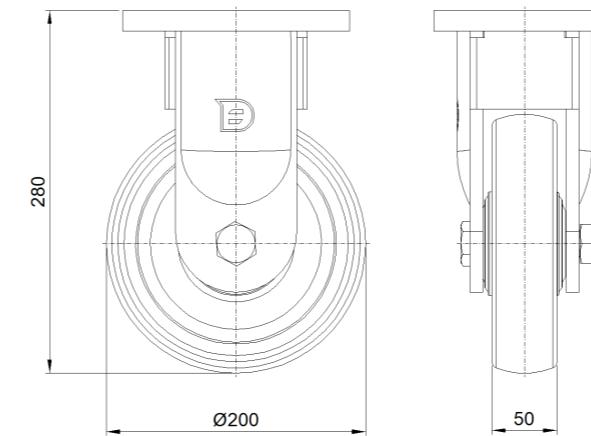

## Mounting

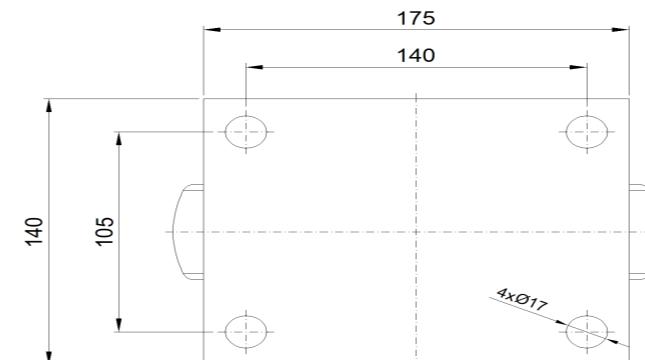

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com