


## 1162 Super Heavy Duty Casters Series (Single Wheel)

VQPU (brown flat) Wheel Diameter x Wheel Width 250 x 80mm

EAN

KS-11621000542111

Portable Casters, Welded Caster Fork, blue painted finish.  
 Base plate Mounting Type device, 210x160mm Bolt Hole Spacing.  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown.  
 Bearings—skew ball bearings.

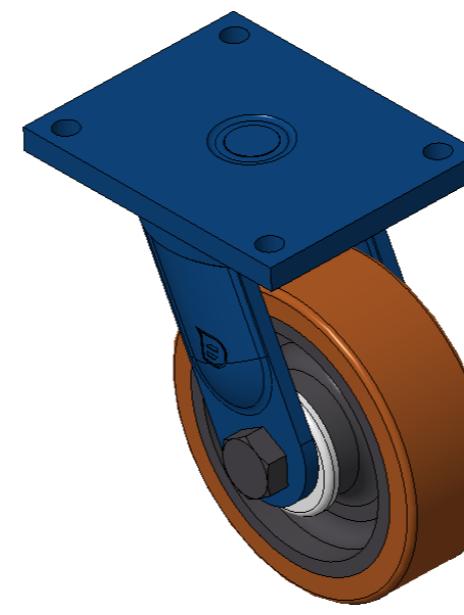

Picture may differ from original product

Wheel Tread: High-Quality Polyurethane  
 Wheel Center: Iron core/Cast iron core

Drawings are for reference only and may differ from the product

## Technical Data

Imperial  Metric

Wheel Diameter 10 "

Wheel Width 3-1/8 "

Wheel Bearing Wheel With Taper Roller Bearings

Plate Size 10-1/16 " x 8 "

Bolt Hole Spacing 8-17/64 " x 6-19/64 "

Plate Hole 7/8 "

Offset 2-13/16 "

Swivel Interference 15-19/32 "

Overall Height 13 "

Swivel Radius 7-15/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 4409lbs

Load Capacity (Static) 6614lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 60.9lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

## Dimensions

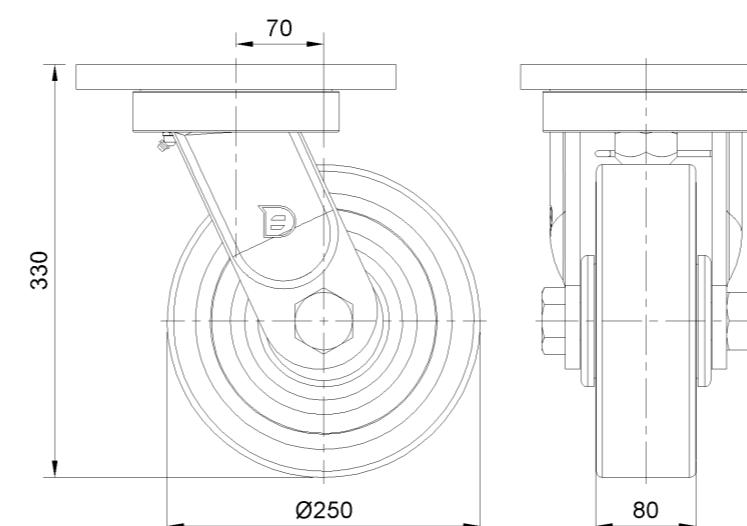

## Mounting

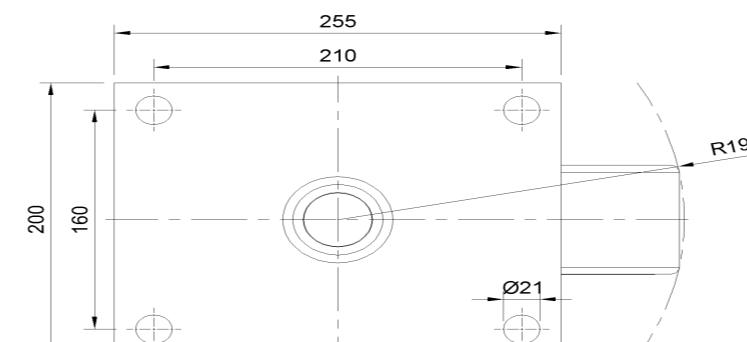

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com