

Product Information Sheet

1162D Super Heavy Duty Casters Series (Double Wheel)



VQPU (brown round) Wheel Diameter x Wheel Width 350 x 90mm


EAN

KS-11621400541311

Rigid Casters, Welded Caster Fork, blue paint finish.  
Base plate Mounting Type device, 210x160mm Bolt Hole Spacing.  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown.  
Bearing—skew ball bearing.

Wheel Tread: Hhigh-Quality Polyurethane  
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

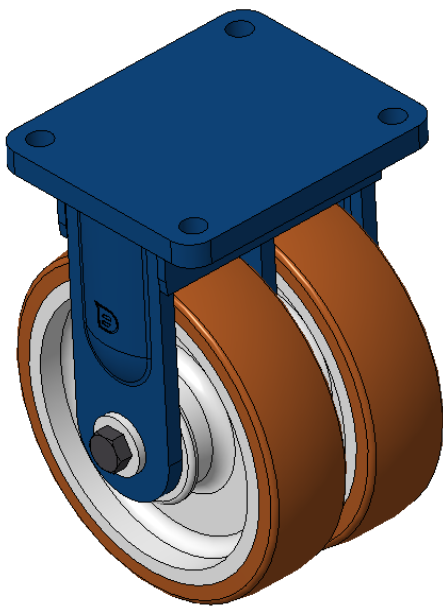

Picture may differ from original product


Technical Data

|                                                                        |                                  |
|------------------------------------------------------------------------|----------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                  |
| Wheel Diameter                                                         | 350mm                            |
| Wheel Width                                                            | 207mm                            |
| Wheel Bearing                                                          | Wheel With Taper Roller Bearings |
| Plate Size                                                             | 300 x 255mm                      |
| Bolt Hole Spacing                                                      | 240x 200mm                       |
| Plate Hole                                                             | 26mm                             |
| Overall Height                                                         | 450mm                            |
| Hardness Of Tread                                                      | 92±5° Shore A                    |
| Load Capacity (Dynamic)                                                | 5800kgs                          |
| Load Capacity (Static)                                                 | 8700kgs                          |
| Temperature                                                            | -20°C to +70°C                   |
| Fork Type                                                              | Rigid Caster                     |
| Stainless                                                              | N/A                              |
| Electrical Conductivity                                                | N/A                              |
| Anti-Static                                                            | N/A                              |
| Weight                                                                 | 82.70kgs                         |
| Standard                                                               | ISO22883                         |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

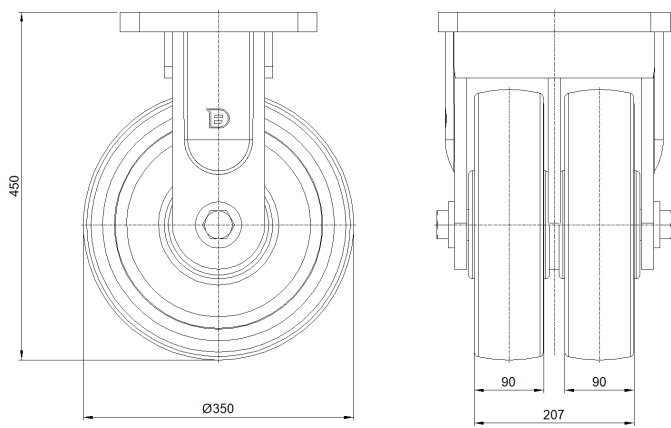

Mounting

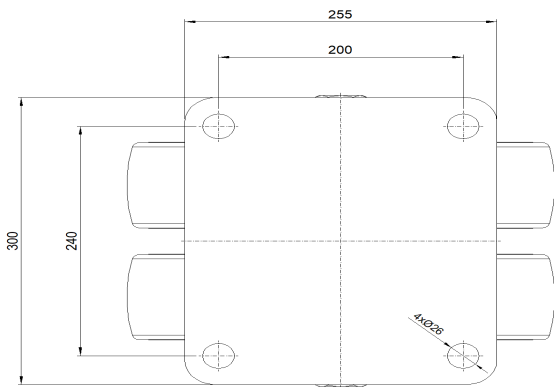

\* For any deviation between metric and imperial spec, please refer to the metric spec.