

1163-1 Self-balancing Caster Series

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


A

KS-11630502552013

Swivel Caster with Welded Caster Fork, Zinc-Plated finish
 Mounting Type - Top Plate, 80x60 Bolt Hole Spacing
 Cast Iron core, High Quality Polyurethane Wheel Tread
 Cast Iron brown, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

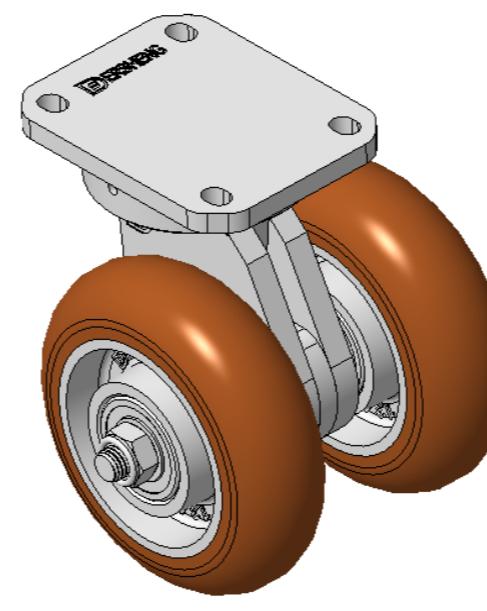

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	125mm
Wheel Width	126mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	110 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	129mm
Offset	33mm
Swivel Interference	226mm
Overall Height	155mm
Swivel Radius	113mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	9.71kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

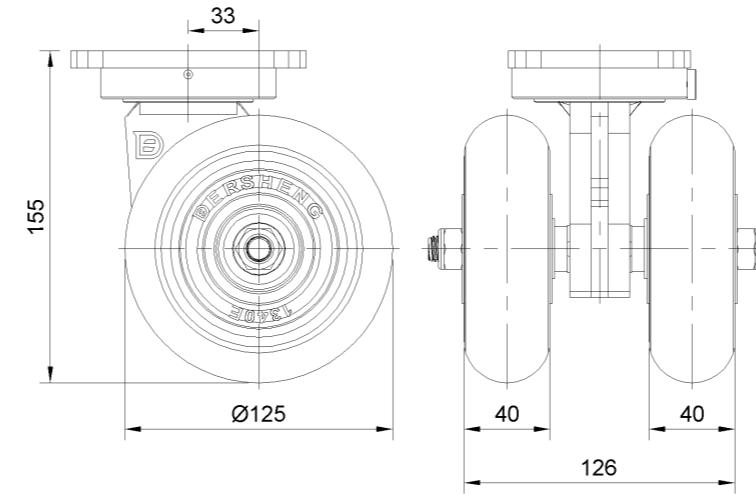

Mounting

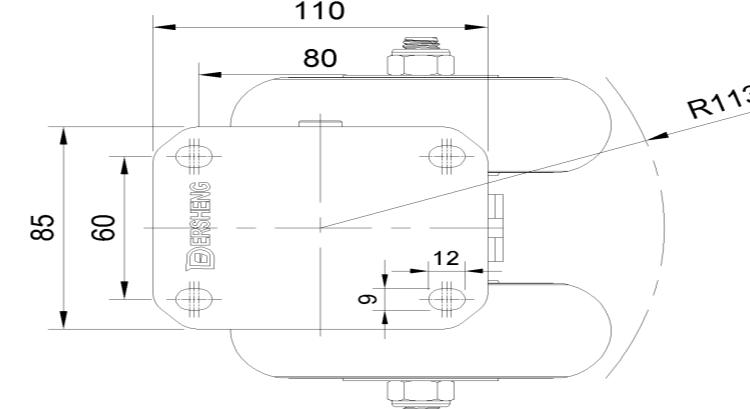

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com