

## 1163-1 Self-balancing Caster Series

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


A

KS-11630502552023

Swivel Caster, Welded Caster Fork, Zinc-Plated finish  
 Mounting Type - Top Plate, 110x75 Bolt Hole Spacing  
 Cast Iron core, High Quality Polyurethane Wheel Tread  
 Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane  
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

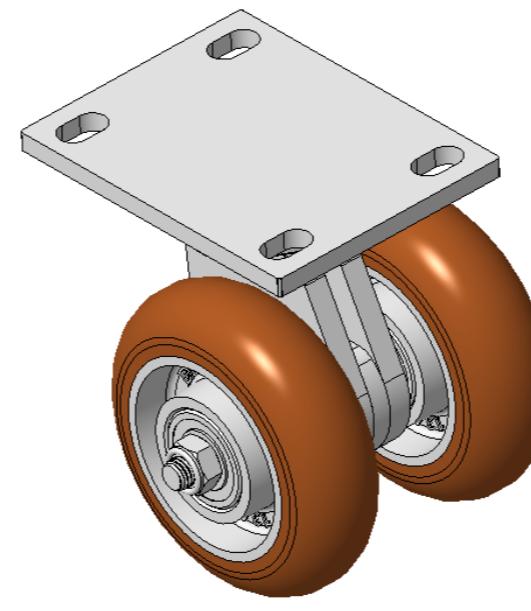

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	125mm
Wheel Width	126mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	2213mm
Offset	33mm
Swivel Interference	226mm
Overall Height	155mm
Swivel Radius	113mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	10.01kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

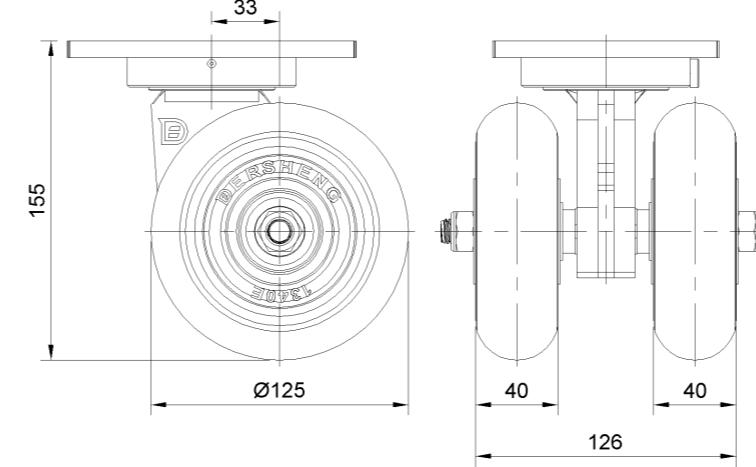

## Mounting

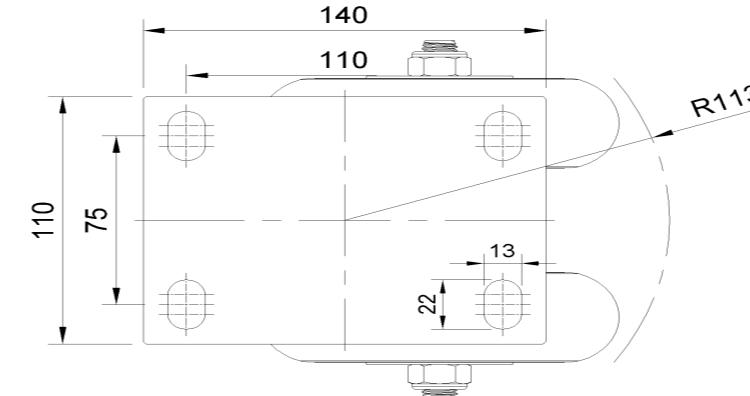

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com