

1163-1 Self-balancing Caster Series

EQPU (brown arc) Wheel Diameter x Wheel Width 150 x 42mm


A

KS-11630602552023

Swivel Caster, Welded Caster Fork, Zinc-Plated finish
 Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
 Cast Iron core, High Quality Polyurethane Wheel Tread
 Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

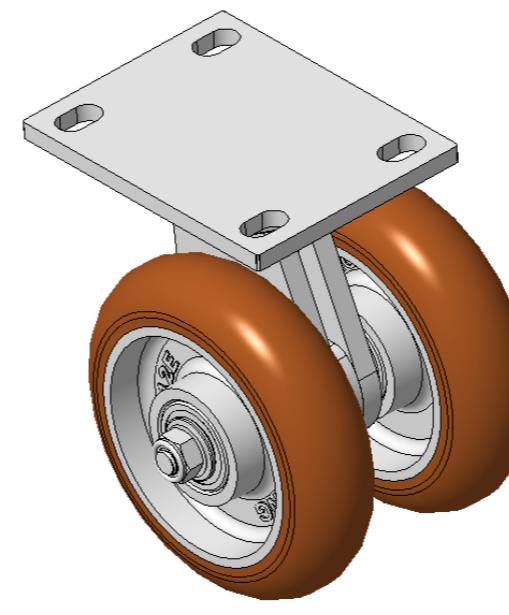

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	150mm
Wheel Width	128mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	2213mm
Offset	35mm
Swivel Interference	254mm
Overall Height	180mm
Swivel Radius	127mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	700kgs
Load Capacity (Static)	1050kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	11.58kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

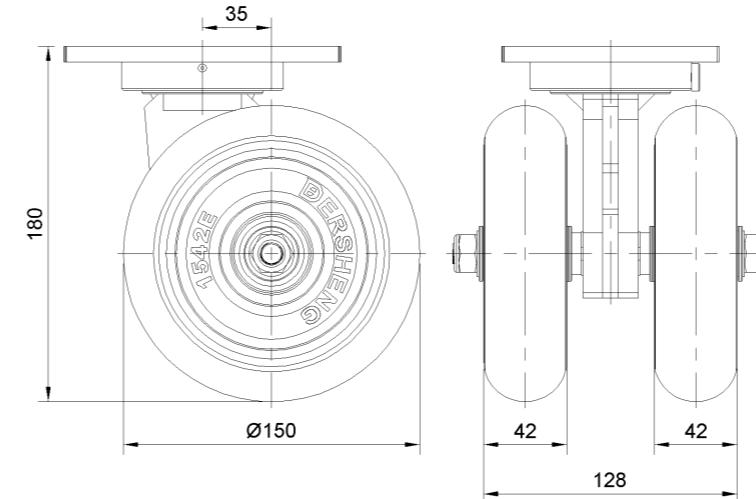

Mounting

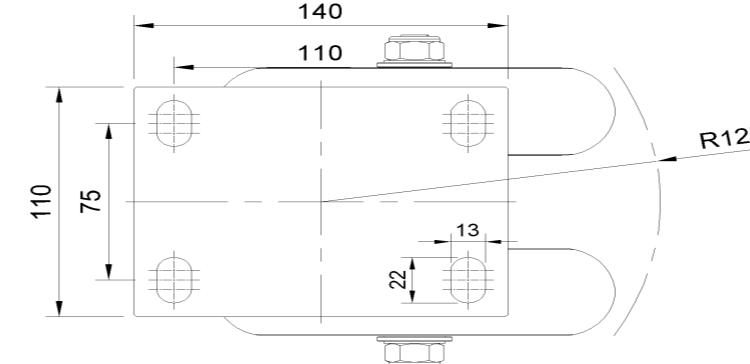

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com